

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/20</b>		A1	(11) International Publication Number: <b>WO 96/22662</b>
			(43) International Publication Date: <b>25 July 1996 (25.07.96)</b>
(21) International Application Number: <b>PCT/US95/15641</b>		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: <b>1 December 1995 (01.12.95)</b>			
(30) Priority Data: <b>08/375,848 20 January 1995 (20.01.95) US</b>			
(71) Applicant: <b>ARRAYCOMM, INC. [US/US]; 125 Nicholson Lane, San Jose, CA 95134 (US).</b>			
(72) Inventors: <b>BARRATT, Craig, H.; 1060 Lakeview Way, Redwood City, CA 94062 (US). PARISH, David, M.; 122 High Park Boulevard, Amherst, NY 14226 (US). ROY, Richar, H., III; 3351 Shady Spring Lane, Mountain View, CA 94040 (US).</b>			
(74) Agents: <b>WOODWARD, Henry, K. et al.; Townsend and Townsend and Crew, One Market Plaza, 20th floor, Stuart Street Tower, San Francisco, CA 94105 (US).</b>		Published With international search report. With amended claims.	

(54) Title: SPECTRALLY EFFICIENT HIGH CAPACITY WIRELESS COMMUNICATION SYSTEMS

## (57) Abstract

A wireless system includes a network of base stations (1) for receiving uplink signals transmitted from a plurality of remote terminals (69) and for transmitting downlink signals to the remote terminals. Each base station (1) includes a plurality of transmitting antenna elements (18) for transmitting downlink signals and receiving antenna elements (19) for receiving uplink signals, a signal processor (13) connected to the antenna elements for determining spatial signatures and multiplexing and demultiplexing functions. A multiple base station controller (66) is used for optimizing network performance.

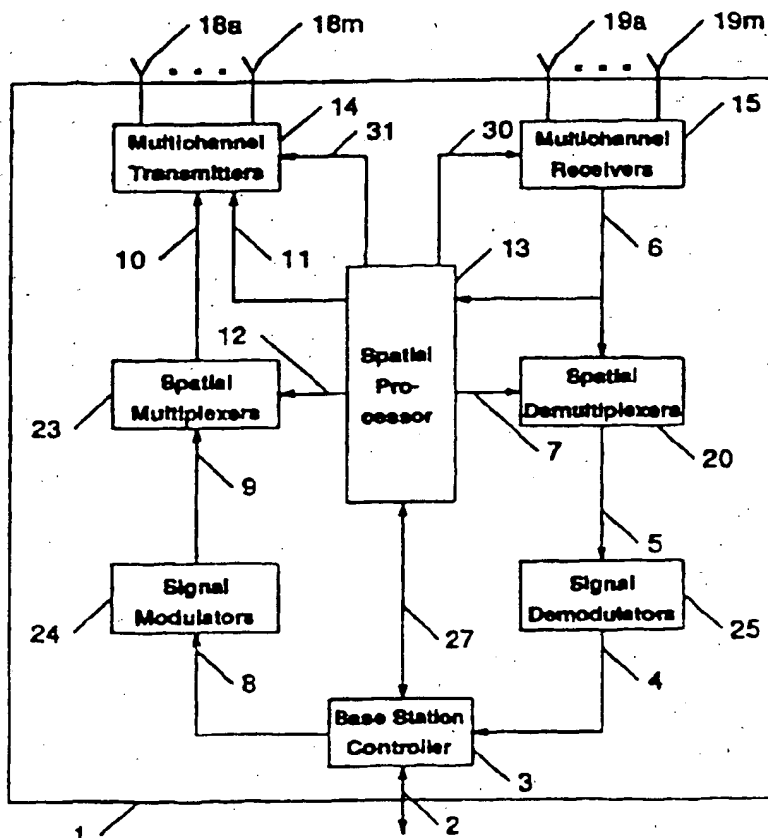

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

SPECTRALLY EFFICIENT HIGH CAPACITY WIRELESS COMMUNICATION SYSTEMS*Background of the Invention*

This invention relates to wireless communication systems and, more particularly, to using antenna arrays and signal processing to dramatically increase the capacity and performance of wireless communication systems.

Wireless communication systems can be used to complement and in some instances replace conventional wired communication systems in areas where conventional wire-line systems are unavailable, unreliable, or excessively expensive. Examples of such areas are: rural areas with a small number of widespread users, underdeveloped areas with little or no current infrastructure, reliability sensitive applications in areas where wired infrastructure is unreliable, and political environments where monopolistic wired service providers maintain artificially high prices. Even in metropolitan areas and highly developed countries, wireless communication systems may be used for low-cost ubiquitous communication, new flexible data services, and emergency communication systems. In general, wireless communication systems may be used for voice communications just like conventional telephone systems, and for data communications in a radio-based wide area or local area network as well.

Wireless users access wireless communication systems using remote terminals such as cellular telephones and data modems equipped with radio transceivers. Such systems (and in particular the remote terminals) have protocols for initiating calls, receiving calls, and general transfer of information. The information transfer can be performed in real-time such as is the case for circuit-switched voice conversations and faxes, or in a store-and-forward manner such as is often the case for electronic mail, paging and other similar message transfer systems.

Wireless communication systems are generally allocated a portion of the radio frequency spectrum for their operation. The allocated portion of the spectrum is divided up into communication channels. These channels may be distinguished by frequency, by time, by code, or by some combination of the above. Each of these communication channels will be referred to herein as *conventional channels*. Depending on the available frequency allocations, the wireless system might have from one to several hundred communication channels. To provide full-duplex communication links, typically some of the communication channels are used for communication from base stations to users' remote terminals (the downlink), and others are used for communication from users' remote terminals to base stations (the uplink).

Wireless communication systems generally have one or more radio base stations, each of which provide coverage to a geographic area known as a cell and often serve as a point-of-presence (PoP) providing connection to a wide area network such as a Public Switched Telephone Network (PSTN). Often a pre-determined subset of the available communication channels is assigned to each radio base station in an attempt to minimize the amount of interference experienced by users of the system. Within its cell, a radio base station can communicate simultaneously with many remote terminals by using different conventional communication channels for each remote terminal.

As aforementioned, base stations can act as PoPs, providing connection to one or more wired communication systems. Such systems include local data networks, wide area data networks, and PSTNs. Thus, remote users are provided access to local and/or wide area data services and the local public telephone system. Base stations can also be used to provide local connectivity without direct access to a wired network such as in local area emergency and mobile battlefield communication systems. Base stations can provide connectivity of various kinds as well. In the aforementioned examples, point-to-point communications where roughly equal amounts of information flow in both directions between two users were assumed. In other applications such as interactive television, information is broadcast to all users simultaneously, and responses from many of the remote units are to be processed at the base stations.

However, conventional wireless communication systems are comparatively spectrally inefficient. In conventional wireless communication systems, only one remote terminal can use any one conventional channel within a cell at any one time. If more than one remote terminal in a cell attempts to use the same channel at the same time, the downlink and uplink signals associated with the remote terminals interfere with each other. Since conventional receiver technology can not eliminate the interference in these combined uplink and downlink signals, remote terminals are unable to communicate effectively with the base station when interference is present. Thus, the total capacity of the system is limited by the number of conventional channels the base station has available, and in the overall system, by the way in which these channels are re-used among multiple cells. Consequently, conventional wireless systems are unable to provide capacity anywhere near that of wired communication systems.

#### *Summary of the Invention*

Accordingly, an object of the present invention is to use antenna arrays and signal processing to separate combinations of received (uplink) signals. Another object of the present invention is to transmit spatially multiplexed downlink signals. The result is a dramatic increase in spectral efficiency, capacity, signal quality, and coverage of wireless communication systems. Capacity is increased by allowing multiple users to simultaneously share the same conventional communication channel within a cell without interfering with one another, and further by allowing more frequent reuse of the same conventional channel within a geographic area covering many cells. Signal quality and coverage area are improved through intelligent processing of signals received from and transmitted by multiple antenna elements. Moreover, a further object of the present invention is to provide capacity gains by dynamically allocating conventional channels among base stations and remote terminals.

Briefly, the invention comprises antenna arrays and signal processing means for measuring, calculating, storing, and using *spatial signatures* of receivers and transmitters in wireless communication systems to increase system capacity, signal quality, and coverage, and to reduce overall system cost. The antenna array and signal processing means can be employed at base stations (PoPs) and remote terminals. Generally there can be different processing requirements at base stations where many signals are being concentrated than at remote terminals where in general only a limited number of communication links are being managed.

As an example, in a wireless local loop application, a particular base station might serve as a PoP for many remote terminals and employ the antenna array and signal processing described herein. Additionally, remote terminals could employ antenna arrays and signal processing to further improve their capacity and signal quality over simpler remote terminals that handle fewer communication links. Herein, the distinction between base stations and remote terminals is that base stations generally act as concentrators connecting

to multiple remote units simultaneously, possibly providing a high capacity connection to a wide area network. While for the sake of clarity much of the ensuing discussion is couched in terms of simple remote terminals that do not employ antenna arrays, nothing herein should be interpreted as preventing such an application. Thus, while hereafter spatial signatures will be associated primarily with remote terminals, when antenna arrays are employed at remote terminals, base stations will have associated spatial signatures as well.

Briefly, there are two spatial signatures associated with each remote terminal/base station pair on a particular frequency channel, where for the purpose of this discussion it is assumed that only base stations have antenna arrays. Base stations associate with each remote terminal in their cell a spatial signature related to how that remote terminal receives signals transmitted to it by the base station's antenna array, and a second spatial signature related to how the base station's receive antenna array receives signals transmitted by the remote terminal. In a system with many conventional channels, each remote terminal/base station pair has transmit and receive spatial signatures for each conventional channel.

The receive spatial signature characterizes how the base station antenna array receives signals from the particular remote unit in a particular conventional channel. In one embodiment, it is a complex vector containing responses (amplitude and phase with respect to a reference) of each the antenna element receivers, i.e., for an  $m$ -element array,

$$\mathbf{a}_{br} = [a_{br}(1), a_{br}(2), \dots, a_{br}(m)]^T, \quad (1)$$

where  $a_{br}(i)$  is the response of the  $i^{\text{th}}$  receiver to a unit power transmitted signal from the remote terminal. Assuming that a narrowband signal  $s_r(t)$  is transmitted from the remote terminal, the base station receiver outputs at time  $t$  are then given by

$$\mathbf{z}_b(t) = \mathbf{a}_{br} s_r(t - \tau) + \mathbf{n}_b(t), \quad (2)$$

where  $\tau$  accounts for the mean propagation delay between the remote terminal and the base station antenna array, and  $\mathbf{n}_b(t)$  represents noise present in the environment and the receivers.

The transmit spatial signature characterizes how the remote terminal receives signals from each of the antenna array elements at the base station in a particular conventional channel. In one embodiment, it is a complex vector containing relative amounts (amplitude and phase with respect to a reference) of each the antenna element transmitter outputs that are contained in the remote terminal receiver output, i.e., for an  $m$ -element array,

$$\mathbf{a}_{rb} = [a_{rb}(1), a_{rb}(2), \dots, a_{rb}(m)], \quad (3)$$

where  $a_{rb}(i)$  is the amplitude and phase (with respect to some fixed reference) of the remote terminal receiver output for a unit power signal transmitted from the  $i^{\text{th}}$  element in the base station array. Assuming that a vector of complex signals  $\mathbf{s}_b = [s_b(1), \dots, s_b(m)]^T$  were transmitted from the antenna array, the output of the remote terminal receiver would be given by

$$z_r(t) = \mathbf{a}_{rb} \mathbf{s}_b(t - \tau) + n_r(t), \quad (4)$$

where  $n_r(t)$  represents noise present in the environment and the receiver. These spatial signatures are calculated (estimated) and stored at each base station for each remote terminal in its cell and for each conventional channel. For fixed remote terminals and base stations in stationary environments, the spatial

signatures can be updated infrequently. In general, however, changes in the RF propagation environment between the base station and the remote terminal can alter the signatures and require that they be updated. Note that henceforth, the time argument in parentheses will be suppressed; integers inside parentheses will be used solely for indexing into vectors and matrices.

In the previous discussion, temporally matched receivers and transmitters were assumed. If there are differences in the temporal responses, these can be equalized using temporal filtering techniques as is well-known. Furthermore, the channel bandwidths were assumed to be small compared to the center frequency of operation. Large bandwidth channels may require more than one complex vector to accurately describe the outputs as is well known.

When more than one remote terminal wants to communicate at the same time, the signal processing means at the base station uses the spatial signatures of the remote terminals to determine if subsets of them can communicate with the base station simultaneously by sharing a conventional channel. In a system with  $m$  receive and  $m$  transmit antenna elements, up to  $m$  remote terminals can share the same conventional channel at the same time.

When multiple remote terminals are sharing a single conventional uplink channel, the multiple antenna elements at the base station each measure a combination of the arriving uplink signals and noise. These combinations result from the relative locations of the antenna elements, the locations of the remote terminals, and the RF propagation environment. The signal processing means calculates spatial demultiplexing weights to allow the uplink signals to be separated from the combinations of uplink signals measured by the multiple antenna elements.

In applications where different downlink signals are to be sent from the base station to the remote terminals, the signal processing means computes spatial multiplexing weights that are used to produce multiplexed downlink signals, which when transmitted from the antenna elements at the base station result in the correct downlink signal being received at each remote terminal with appropriate signal quality.

In applications where the same signal is to be transmitted from the base station to a large number (more than the number of antenna elements) of remote terminals, the signal processing means computes weights appropriate for broadcasting the signal, covering the area necessary to reach all the remote terminals.

Therefore, the signal processing means facilitates simultaneous communication between a base station and multiple remote terminals on the same conventional channel. The conventional channel may be a frequency channel, a time slot in a time division multiplexed system, a code in a code division multiplexed system, or any combination of the above.

In one embodiment, all elements of a single antenna array transmit and receive radio frequency signals, while in another embodiment the antenna array includes separate transmit antenna elements and receive antenna elements. The number of transmit and receive elements need not be the same. If they are not the same, the maximum number of point-to-point links that can simultaneously be established in one conventional channel is given by the smaller of the two numbers.

The invention and objects and features thereof will be more readily apparent from the following detailed description together with the figures and appended claims.

#### *Brief Description of The Drawings*

Figure 1 is a functional block diagram of a base station in accordance with the invention.

Figure 2 is a functional block diagram of multichannel receivers in the base station.

Figure 3 is a functional block diagram of a spatial demultiplexer in the base station.

Figure 5 is a functional block diagram of a multichannel transmitter in the base station.

Figure 6 is a functional block diagram of a spatial processor in the base station.

Figure 7 is a functional block diagram of a remote terminal with a transponder switch.

Figure 8 is a functional block diagram of a remote terminal.

Figure 9 is a schematic diagram of a network system comprised of three base stations and a multiple base station controller.

*List of Reference Numerals*

1. base station
2. base station communication link
3. base station controller
4. demodulated received signal
5. spatially separated uplink signals
6. received signal measurements
7. demultiplexing weights
8. data to be transmitted directionally
9. modulated signal to be multiplexed for transmission
10. modulated, spatially multiplexed signals to be transmitted
11. calibration signals to be transmitted
12. multiplexing weights
13. spatial processor
14. multichannel transmitters
15. multichannel receivers
- 16a. multichannel receiver
- 16m. multichannel receiver
- 17a. multichannel transmitter
- 17m. multichannel transmitter
- 18a. transmit antenna
- 18m. transmit antenna
- 19a. receive antenna
- 19m. receive antenna
20. spatial demultiplexer
21. adder
- 22a. multipliers
- 22m. multipliers
23. spatial multiplexer
24. signal modulator
25. signal demodulator
- 26a. multipliers
- 26m. multipliers
27. spatial control data
28. spatial parameter data
29. common receiver oscillator
30. receiver control data
31. transmitter control data
32. common transmitter oscillator

33. spatial processor controller
34. active remote terminal list
35. channel selector
36. remote terminal database
37. spatial weight processor
38. spatial signature processor
39. remote terminal antenna
40. remote terminal duplexer
41. remote terminal duplexer output
42. remote terminal receiver
43. remote terminal received signal
44. remote terminal received calibration signal
45. remote terminal demodulator
46. remote terminal demodulated data
47. remote terminal keyboard and keyboard controller
48. remote terminal keyboard data
49. remote terminal display data
50. remote terminal display and display controller
51. remote terminal modulator
52. remote terminal data to be transmitted
53. remote terminal modulated data to be transmitted
54. remote terminal transmitter
55. remote terminal transmitter output
56. remote terminal transmitter control data
57. remote terminal receiver control data
58. remote terminal microphone
59. remote terminal microphone signal
60. remote terminal speaker
61. remote terminal speaker signal
62. remote terminal central processing unit
63. remote terminal transponder switch
64. remote terminal transponder switch control
65. wide area network
66. multiple base station controller
- 67a. cell boundary
- 67b. cell boundary
- 67c. cell boundary
68. high speed message link
69. remote terminal



*Description of Invention*

Figure 1 depicts the preferred embodiment of a base station 1. A base station controller 3 acts as an interface between base station 1 and any external connection via a base station communication link 2, and serves to coordinate the overall operation of base station 1. In the preferred embodiment, base station controller 3 is implemented with a conventional central processing unit and associated memory and programming.

Incoming or uplink radio transmissions impinge on an antenna array composed of a number,  $m$ , of receive antenna elements 19(a, ..., m) each of whose outputs is connected to one of  $m$  multichannel receivers in a bank of phase-coherent multichannel receivers 15. Multichannel receivers 15 have well-matched amplitude and phase responses across the frequency bands of interest, or, as is well known, correction filters are implemented to account for any differences.

The illustrative embodiment describes a conventional frequency division multiple access system. Each multichannel receiver is capable of handling multiple frequency channels. The symbol  $N_{cc}$  will be used to reference the maximum number of conventional frequency channels that can be handled by the receivers. Depending on the frequencies allocated for the operation of the wireless communication system and the bandwidths chosen for particular communication links,  $N_{cc}$  could be as small as one (a single frequency channel) or as large as thousands. In alternate embodiments, multichannel receivers 15 might instead handle multiple time slots, multiple codes, or some combination of these well known multiple access techniques.

In each conventional channel, receive antenna elements 19(a, ..., m) each measure a combination of the arriving uplink signals from the remote terminals sharing this conventional channel. These combinations result from the relative locations of the antenna elements, the locations of the remote terminals, and the RF propagation environment, and for narrowband signals are given by equation (2).

Figure 2 depicts individual multichannel receivers 16(a, ..., m) with antenna element connections, common local receiver oscillators 29, one for each conventional frequency channel to be used at that base station, and received signal measurements 6. Common local receiver oscillators 29 ensure that the signals from receive antenna elements 19(a, ..., m) are coherently down-converted to baseband; its  $N_{cc}$  frequencies are set so that multichannel receivers 16(a, ..., m) extract all  $N_{cc}$  frequency channels of interest. The frequencies of common local receiver oscillators 29 are controlled by a spatial processor 13 (figure 1) via receiver control data 30. In an alternate embodiment, where multiple frequency channels are all contained in a contiguous frequency band, a common local oscillator is used to downconvert the entire band which is then digitized, and digital filters and decimators extract the desired subset of channels using well known techniques.

The illustrative embodiment describes a frequency division multiple access system. In a time division multiple access or code division multiple access system, common oscillators 29 would be augmented to relay common time slot or common code signals respectively from spatial processor 13, via receiver control data 30, to multichannel receivers 16(a, ..., m). In these embodiments, multichannel receivers 16(a, ..., m) perform selection of conventional time division channels or conventional code division channels in addition to down conversion to baseband.

Referring again to Figure 1, multichannel receivers 15 produce received signal measurements 6 which are supplied to spatial processor 13 and to a set of spatial demultiplexers 20. In this embodiment, received signal measurements 6 contain  $m$  complex baseband signals for each of  $N_{cc}$  frequency channels.

Figure 6 shows a more detailed block diagram of spatial processor 13. Spatial processor 13 produces and maintains spatial signatures for each remote terminal for each conventional frequency channel, and calculates spatial multiplexing and demultiplexing weights for use by spatial demultiplexers 20 and spatial multiplexers 23. In the preferred embodiment, spatial processor 13 is implemented using a conventional central processing unit. Received signal measurements 6 go into a spatial signature processor 38 which estimates and updates spatial signatures. Spatial signatures are stored in a spatial signature list in a remote terminal database 36 and are used by channel selector 35 and spatial weight processor 37, which also produces demultiplexing weights 7 and multiplexing weights 12. A spatial processor controller 33 connects to spatial weight processor 37 and also produces receiver control data 30 transmitter control data 31 and spatial control data 27.

Referring again to Figure 1, spatial demultiplexers 20 combine received signal measurements 6 according to spatial demultiplexing weights 7. Figure 3 shows a spatial demultiplexer 20 for a single conventional channel. In this embodiment, arithmetic operations in spatial demultiplexer 20 are carried out using general purpose arithmetic chips. In figure 3,  $z_b(i)$  denotes the  $i^{\text{th}}$  component of received signal measurement vector 6 for a single conventional channel, and  $w_{rx}^*(i)$  denotes the complex conjugate of the  $i^{\text{th}}$  component of the spatial demultiplexing weight vector 7 for a remote terminal using this conventional channel.

For each remote terminal on each conventional channel, the spatial demultiplexer 20 computes the inner-product of the spatial demultiplexing weights 7 for the conventional channel with the received signal measurements 6:

$$w_{rx}^* z_b = w_{rx}^*(1)z_b(1) + \dots + w_{rx}^*(m)z_b(m), \quad (5)$$

where  $(\cdot)^*$  indicates complex conjugation, numbers inside parentheses indicate element number (e.g.,  $w_{rx}(i)$  is the  $i^{\text{th}}$  component of the vector  $w_{rx}$ ), the multiplication is performed by multipliers 22(a, ..., m), and the addition is performed by adder 21. For each remote terminal on each conventional channel, the output of adder 21 given by equation (5) comprises the spatially separated uplink signals 5.

Referring again to Figure 1, the outputs of spatial demultiplexers 20 are spatially separated uplink signals 5 for each remote terminal communicating with the base station. Spatially separated uplink signals 5 are demodulated by signal demodulators 25, producing demodulated received signals 4 for each remote terminal communicating with the base station. Demodulated received signals 4 and corresponding spatial control data 27 are available to base station controller 3.

In embodiments where channel coding of the signals sent by remote terminals is performed, base station controller 3 sends the demodulated received signals 4 to spatial processor 13 which, using well known decoding techniques, estimates Bit-Error-Rates (BERs) and compares them against acceptable thresholds stored in the remote terminal database 36. If the BERs are unacceptable, spatial processor 13 reallocates resources so as to alleviate the problem. In one embodiment, links with unacceptable BERs are assigned to new channels using the same strategy as adding a new user with the exception that the current channel is not acceptable unless the current set of users of that particular channel changes. Additionally, recalibration of the receive signature for that remote terminal/base station pair is performed when that conventional channel is available.

For transmission, signal modulators 24 produce modulated signals 9 for each remote terminal the base station is transmitting to, and a set of spatial multiplexing weights 12 for each remote terminal are applied

to the respective modulated signals in spatial multiplexers 23 to produce spatially multiplexed signals to be transmitted 10 for each of the  $m$  transmit antennas 18(a, ..., m) and each of the  $N_{cc}$  conventional channels.

In the illustrative embodiment the number  $N_{cc}$  of downlink conventional channels is the same as the number  $N_{cc}$  of uplink conventional channels. In other embodiments, there may be different numbers of uplink and downlink conventional channels. Furthermore, the channels may be of different types and bandwidths as is the case for an interactive television application where the downlink is comprised of wideband video channels and the uplink employs narrowband audio/data channels.

Additionally, the illustrative embodiment shows the same number of antenna elements,  $m$ , for transmit and receive. In other embodiments, the number of transmit antenna elements and the number of receive antenna elements may be different, up to and including the case where transmit employs only one transmit antenna element in an omnidirectional sense such as in an interactive television application.

Figure 4 shows the spatial multiplexer for one remote terminal on a particular conventional channel. Arithmetic operations in spatial multiplexer 23 are carried out using general purpose arithmetic chips. The component of modulated signals 9 destined for this remote terminal on this conventional channel is denoted by  $s_b$ , and  $w_{ix}(i)$  denotes the  $i^{th}$  component of spatial multiplexing weight vector 12 for this remote terminal on this conventional channel.

For each remote terminal on each conventional channel, the spatial multiplexer 23 computes the product of its spatial multiplexing weight vector (from the spatial multiplexing weights 12) with its modulated signal  $s_b$  (from the modulated signals 9):

$$w_{ix}^* s_b = \begin{bmatrix} w_{ix}^*(1)s_b \\ \vdots \\ w_{ix}^*(m)s_b \end{bmatrix} \quad (6)$$

where  $(\cdot)^*$  indicates complex conjugate (transpose) and the multiplication is performed by multipliers 26(a, ..., m). For each conventional channel, equation (6) is evaluated by the spatial multiplexer 23 for each remote terminal that is being transmitted to on this conventional channel. Corresponding to each remote terminal is a different multiplexing weight vector and modulated signal. For each conventional channel, spatial multiplexer 23 adds the spatially multiplexed signals for each remote terminal being transmitted to on this conventional channel, producing modulated and spatially multiplexed signals 10 that are the signals to be transmitted for each conventional downlink channel from each antenna.

Modulated and spatially multiplexed signals 10 are inputs to a bank of  $m$  phase coherent multichannel transmitters 14. Multichannel transmitters 14 either have well-matched amplitude and phase responses across the frequency bands of interest, or, as is well known, correction filters are implemented to account for any differences. Figure 5 depicts multichannel transmitters 17(a, ..., m) with antenna connections, common local transmitter oscillators 32, and digital inputs 10. Common local transmitter oscillators 32 ensure that the relative phases of spatially multiplexed signals 10 are preserved during transmission by transmit antennas 18(a, ..., m). The frequencies of common local transmitter oscillators 32 are controlled by spatial processor 13 (see figure 1) via transmitter control data 31.

In an alternate embodiment, spatial multiplexer 23 uses well known baseband multiplexing techniques to multiplex all the calculated conventional channel signals to be transmitted into a single wideband signal to be upconverted and transmitted by each of the multichannel transmitters 17(a, ..., m). The multiplexing can be performed either digitally or in analog as appropriate.

The illustrative embodiment shows a system with multiple frequency channels. In a time division multiple access or code division multiple access system, common oscillators 32 would be augmented to relay common time slot or common code signals respectively from spatial processor 13, via transmitter control data 31, to multichannel transmitters 17(a, ...m).

Referring again to figure 1, in applications where transmit spatial signatures are required, spatial processor 13 is also able to transmit predetermined calibration signals 11 for each antenna on a particular conventional downlink channel. Spatial processor 13 instructs multichannel transmitters 17(a, ...m), via transmitter control data 31, to transmit predetermined calibration signals 11 in place of spatially multiplexed signals 10 for a particular conventional downlink channel. This is one mechanism used for determining the transmit spatial signatures of the remote terminals on this conventional downlink channel.

In alternate embodiments where well known channel coding techniques are used to encode the signals to be transmitted to remote terminals, remote terminals employ well known decoding techniques to estimate BERs which are then reported back to the base station on their uplink channel. If these BERs exceed acceptable limits, corrective action is taken. In one embodiment, the corrective action involves reallocating resources by using the same strategy as adding a new user with the exception that the current channel is not acceptable unless the current set of users of that particular channel changes. Additionally, recalibration of the transmit signature for that remote terminal/base station pair is performed when that conventional channel is available.

Figure 7 depicts the component arrangement in a remote terminal that provides voice communication. The remote terminal's antenna 39 is connected to a duplexer 40 to permit antenna 39 to be used for both transmission and reception. In an alternate embodiment, separate receive and transmit antennas are used eliminating the need for duplexer 40. In another alternate embodiment where reception and transmission occur on the same frequency channel but at different times, a transmit/receive (TR) switch is used instead of a duplexer as is well known. Duplexer output 41 serves as input to a receiver 42. Receiver 42 produces a down-converted signal 43 which is the input to a demodulator 45. A demodulated received voice signal 61 is input to a speaker 60.

Demodulated received control data 46 is supplied to a remote terminal central processing unit 62 (CPU). Demodulated received control data 46 is used for receiving data from base station 1 during call setup and termination, and in an alternate embodiment, for determining the quality (BER) of the signals being received by the remote terminal for transmission back to the base station as described above.

Remote terminal CPU 62 is implemented with a standard microprocessor. Remote terminal CPU 62 also produces receiver control data 57 for selecting the remote terminal's reception channel, transmitter control data 56 for setting the remote terminal's transmission channel and power level, control data to be transmitted 52, and display data 49 for remote terminal display 50. Remote terminal CPU 62 also receives keyboard data 48 from remote terminal keyboard 47.

The remote terminal's voice signal to be transmitted 59 from microphone 58 is input to a modulator 51. Control data to be transmitted 52 is supplied by remote terminal CPU 62. Control data to be transmitted 52 is used for transmitting data to base station 1 during call setup and termination as well as for transmitting information during the call such as measures of call quality (e.g., bit error rates (BERs)). The modulated signal to be transmitted 53, output by modulator 51, is up-converted and amplified by a transmitter 54, producing a transmitter output signal 55. Transmitter output 55 is then input to duplexer 40 for transmission by antenna 39.

In an alternate embodiment, the remote terminal provides digital data communication. Demodulated received voice signal 61, speaker 60, microphone 58, and voice signal to be transmitted 59 are replaced by digital interfaces well-known in the art that allow data to be transmitted to and from an external data processing device (for example, a computer).

Referring again to figure 7, the remote terminal allows received data 43 to be transmitted back to base station 1 via switch 63 controlled by remote terminal CPU 62 through switch control signal 64. In normal operation, switch 63 drives transmitter 54 with modulated signal 53 of modulator 51. When the remote terminal is instructed by base station 1 to enter calibration mode, remote terminal CPU 62 toggles switch control signal 64, which instructs switch 63 to drive transmitter 54 with received data 43.

Figure 8 shows an alternate embodiment of the remote terminal calibration function. Switch 63 of figure 7 is no longer used. Instead, the output of receiver 42 is supplied to remote terminal CPU 62 by data connection 44. In normal operation remote terminal CPU 62 ignores data connection 44. In calibration mode, remote terminal CPU 62 uses data connection 44 to compute the remote terminal's transmit spatial signature, which is transmitted back to base station 1 through modulator 51 and transmitter 54 as control data to be transmitted 52.

In an alternate embodiment, special calibration procedures in the remote terminal are not required. In many conventional wireless protocol standards, remote terminals regularly report received signal strength or receive signal quality back to the base station. In this embodiment, the received signal strength reports are sufficient to compute the remote terminal's transmit spatial signature, as described below.

#### *Operation of Invention*

##### **General Principles — Base Station**

In many respects, the spectrally efficient base station shown in figure 1 behaves much like a standard wireless communication system base station. The primary distinction is that the spectrally efficient base station supports many more simultaneous conversations than it has conventional communication channels. The conventional communication channels may be frequency channels, time channels, code channels, or any combination of these. The spatial multiplexer/demultiplexer increases the system capacity by allowing multiple spatial channels on each of these conventional channels. Moreover, by combining signals from multiple receive antennas, the spatial demultiplexer 20 produces spatially separated uplink signals 5 that have substantially improved signal-to-noise, reduced interference, and improved quality in multipath environments compared to a standard base station.

In the illustrative embodiment, a wireless communication system comprised of multiple remote terminals and base stations incorporating antenna arrays and spatial signal processing is described. Such systems have application, for example, in providing wireless access to the local PSTN. Information transfers (or calls) are initiated by either a remote terminal or by communication link 2 through base station controller 3. Call initialization takes place on a downlink and uplink control channel as is well known in the art. In the present embodiment, the downlink control channel is transmitted using transmission antennas 18(a...m). In an alternate embodiment, the downlink control channel is broadcast from a single, omnidirectional antenna. Base station controller 3 passes the identification of the remote terminal to be involved in the call to spatial processor 13 which uses the stored spatial signatures of that remote terminal to determine which conventional communication channel the remote terminal should use. The selected channel may already be occupied by several remote terminals, however spatial processor 13 uses the spatial signatures of all of

the remote terminals on that channel to determine that they can share the channel without interference. In a system with  $m$  receive and  $m$  transmit antenna elements, up to  $m$  remote terminals can share the same conventional channel. More generally, the number of point-to-point full-duplex communication links that can occupy the same conventional channel at the same time is given by the smaller of the number of receive and transmit elements.

Spatial processor 13 uses calculated spatial multiplexing and demultiplexing weights for the selected channel and the remote terminal in question to configure spatial multiplexer 23 and spatial demultiplexer 20. Spatial processor 13 then informs controller 3 of the selected channel. As in a conventional base station, controller 3 then commands the remote terminal (via the downlink control channel) to switch to the selected channel for continued communications. In the event that the remote terminal has power control capabilities, as is well known in the art, controller 3 also commands the remote terminal to adjust its power to an appropriate level based on parameters such as the power levels of the other remote terminals sharing the same conventional channel and the required signal quality for each link as discussed below. At the termination of communications, the remote terminal returns to its idle state where it monitors the downlink control channel awaiting its next call. This frees up that "spatial channel" for another remote terminal.

#### Spatial Processing — Base Station

Figure 6 shows a block diagram of spatial processor 13. It is controlled by spatial processor controller 33, which interfaces to base station controller 3 via link 27. Spatial processor controller 33 controls the gain and frequency settings of multichannel transmitters 14 and multichannel receivers 15 by control lines 31 and 30.

Spatial processor 13 maintains an active remote terminal list 34 that catalogs which remote terminals are currently using each conventional communication channel as well as their current transmit power levels. Other parameters of the remote terminals such as modulation formats currently used, receiver noise levels in current frequency channels, and current signal quality requirements are stored as well. Spatial processor 13 also maintains a spatial signature list in the remote terminal database 36, which in alternate embodiments includes remote terminals' power control levels, allowed conventional frequency channels for receive and transmit, and list of modulation formats understood.

The spatial signature list in the remote terminal database 36 contains a transmit spatial signature,  $a_{r,i}$ , and a receive spatial signature,  $a_{b,r}$ , for every frequency of operation for each remote terminal. In another embodiment, estimates of the quality (e.g., estimate error covariances) of the spatial signatures are stored as well. As aforementioned, the transmit spatial signature,  $a_{r,i}$ , for a particular remote terminal and a particular frequency channel is defined as the vector of relative complex signal amplitudes that would be seen arriving at that particular remote terminal as a result of identical (equal amplitude and phase) unit power narrow band signals, at that particular frequency, being transmitted through multichannel transmitters 14 and transmission antennas 18(a, ..., m). The transmit spatial signature includes the effects of the propagation environment between the base station and the remote terminal, as well as any amplitude and phase differences in multichannel transmitters 14, antenna cables, and transmission antennas 18(a, ..., m). The receive spatial signature,  $a_{b,r}$ , for a particular remote terminal and a particular frequency channel, is defined as the vector of complex signal amplitudes that would be measured at the outputs of

multichannel receiver 16 given a single unit power narrow band signal being transmitted by that particular remote terminal, at that particular frequency.

When the base station controller 1 forwards a call initialization request for a particular remote terminal via link 27, a channel selector 35 searches active remote terminal list 34 to find a conventional communication channel that can accommodate the remote terminal. In the preferred embodiment, there is a receive active remote terminal list and a transmit active remote terminal list which are used by channel selector 35 in forming both a multiplexing and a demultiplexing spatial signature matrix for each conventional channel. For each conventional channel, the columns of the demultiplexing and rows of the multiplexing spatial signature matrices are the stored receive and transmit spatial signatures of each of the remote terminals currently active on (using) that channel plus one more column containing the appropriate spatial signature of the remote terminal requesting a communication channel.

The multiplexing spatial signature matrix for each channel,  $A_{rb,p}$  (where  $p$  denotes the conventional channel number), is formed using transmit spatial signatures as shown in equation (7):

$$A_{rb,p} = \begin{bmatrix} a_{rb,p}^1 \\ \vdots \\ a_{rb,p}^{n_p} \end{bmatrix}, \quad (7)$$

where  $a_{rb,p}^i$  is the transmit spatial signature for  $i^{th}$  remote terminal assigned to channel  $p$  and  $n_p$  is the total number of remotes on conventional channel  $p$ .

The demultiplexing spatial signature matrix,  $A_{br,p}$ , is formed using receive spatial signatures as shown in equation (8):

$$A_{br,p} = [a_{br,p}^1, a_{br,p}^2, \dots, a_{br,p}^{n_p}], \quad (8)$$

where  $a_{br,p}^i$  is the receive spatial signature for  $i^{th}$  remote terminal assigned to channel  $p$ .

Channel selector 35 calculates functions of these signature matrices to assess whether or not communication between the base station and the new remote terminal can be successfully carried out on the selected conventional channel. In the preferred embodiment, channel selector 35 first calculates spatial multiplexing and demultiplexing weights for that remote terminal and then uses these weights to estimate link performance.

In the illustrative embodiment, spatial multiplexing weights are the rows of a matrix  $W_{tx}$  given in equation (9):

$$W_{tx} = S_b (A_{rb} A_{rb}^*)^{-1} A_{rb}, \quad (9)$$

where  $(\cdot)^{-1}$  is the inverse of a matrix,  $(\cdot)^*$  is the complex conjugate transpose of a matrix,  $A_{rb}$  is the multiplexing spatial signature matrix  $A_{rb,p}$  associated with the relevant conventional channel, and  $S_b$  is a (diagonal) matrix containing the amplitudes of the signals to be transmitted. The amplitudes to be transmitted,  $S_b$ , are calculated in the preferred embodiment using the (diagonal) matrix of remote terminal receiver mean-square noise voltages ( $N$ ) and the diagonal matrix of minimum desired signal qualities ( $SNR_{des}$ ) as given in equation (10):

$$S_b = (SNR_{des} \times N)^{1/2} \quad (10)$$

Now channel selector 35 calculates the average mean-square voltage (power)  $\overline{P}_b$  to be transmitted from each element as the sum of squares of the elements in each row of  $W_{tx}$ , i.e.,

$$\overline{P}_b = \text{diag}\{W_{tx} W_{tx}^*\}. \quad (11)$$

and the peak square voltage (power)  $P_b^{peak}$  to be transmitted from each element as the square of sum of the magnitude of the elements in each row of  $W_{tx}$ , i.e.,

$$P_b^{peak} = \text{diag}\{abs(W_{tx}) I abs(W_{tx}^*)\}, \quad (12)$$

where  $I$  is a matrix of all ones of the appropriate size and  $abs(\cdot)$  is elementwise absolute value. Channel selector 35 compares these values against the limits for each of the transmitters for each of the elements. If any of the average or peak values exceed the acceptable limits, the remote terminal in question is not assigned to the candidate channel. Otherwise, the ability to successfully receive from the remote terminal is checked. In an alternate embodiment, the transmitter limits are used as inequality constraints in an optimization algorithm for calculating transmit weights that meet the specifications given and that also result in the minimum amount of transmitted power possible. If transmit weights satisfying the constraints can not be found, the remote terminal in question is not assigned to the candidate channel. Such optimization algorithms are well known.

To test the uplink, channel selector 35 calculates spatial demultiplexing weights  $W_{rx}$  using  $A_{br}$ , the demultiplexing spatial signature matrix  $A_{br,r}$  associated with the relevant conventional channel, as given for the preferred embodiment in equation (13):

$$W_{rx} = (A_{br} P_r A_{br}^* + R_{nn})^{-1} A_{br} P_r, \quad (13)$$

where  $P_r$  is a (diagonal) matrix of mean-square amplitudes (powers) transmitted by the remote terminals and  $R_{nn}$  is the base station receiver noise covariance. Then, the expected value of the normalized mean-squared error covariance is calculated in one embodiment as follows:

$$\overline{MSE} = P_r^{-1/2} ((I - W_{rx}^* A_{br}) P_r (I - W_{rx}^* A_{br})^* + W_{rx}^* R_{nn} W_{rx}) P_r^{-1/2} \quad (14)$$

The notation  $(\cdot)^{-1/2}$  indicates complex conjugate transpose of the square root of the matrix. The inverse of  $MSE$  is an estimate of the expected Signal-to-Interference-plus-Noise Ratio ( $SINR$ ) at the output of the spatial demultiplexer:

$$\overline{SINR} = \overline{MSE}^{-1} \quad (15)$$

If all of the diagonal elements of  $\overline{SINR}$  are above the desired thresholds based on the signal quality required to be received from each remote terminal, the remote terminal is allowed access to the channel. If the candidate remote terminal is below its threshold and has the ability to increase its output power, the same computations are again performed for increasing remote terminal power output until either the maximum output power for that remote terminal is reached and the  $\overline{SINR}$  is still insufficient, another remote terminal  $\overline{SINR}$  falls below its threshold in which case its power is increased if possible, or all thresholds are exceeded. If acceptable remote terminal transmit powers can be found, the remote terminal is granted access to this particular conventional channel, otherwise it is denied access and another conventional channel is checked.

In an alternate embodiment, the calculation of demultiplexing weights is performed using well known optimization procedures with the objective of minimizing remote terminal transmit powers subject to estimated signals at the base station meeting or exceeding their minimum desired  $SINR$ 's.

Also, in an alternate embodiment, in the case that no conventional channel can be found to accommodate the remote terminal, channel selector 35 calculates whether some rearrangement of the existing remote terminals among the conventional channels would allow the remote terminal to be supported on



some conventional channel. In this case, the remote terminal will only be denied communication at this time if no rearrangement of existing users allows the remote terminal to be accommodated.

In an alternate embodiment employing frequency division duplexing (FDD), remote terminals are not restricted to being assigned a fixed conventional channel pair for transmit and receive. A sufficiently flexible system architecture is employed where channel selector 35 may choose to assign a particular remote to transmit and receive conventional channels separated by different frequency duplex offsets in order to minimize overall system interference levels.

Spatial multiplexing and demultiplexing weights for remote terminals already using a conventional channel must be recalculated because adding a new remote terminal to that conventional channel may change them significantly. In the preferred embodiment, channel selector 35, having already done the necessary calculations, sends the new spatial multiplexing and demultiplexing weights to the spatial weight processor 37 for use in setting up the spatial multiplexer 23 and demultiplexer 20. In an alternate embodiment, spatial weight processor 37 uses the spatial signature matrices sent to it by channel selector 35 to calculate different sets of spatial multiplexing and demultiplexing weights for all of the remote terminals on that conventional channel.

Spatial weight processor 37 then sends the new spatial demultiplexing weights to spatial demultiplexers 20 and the new spatial multiplexing weights to the spatial multiplexers 23 for this conventional channel, updates the active remote terminal list 34, and informs spatial processor controller 33 which in turn informs base station controller 3 of the selected channel. Base station controller 3 then transmits a message to the remote terminal using the downlink control channel that instructs the remote terminal to switch to the desired conventional channel.

It can be shown from equation (9) that the multiplexing weight matrices  $W_{ix}$  have the property:

$$A_{rb} W_{ix}^* = S_b. \quad (16)$$

This means that at the  $i^{th}$  remote terminal, the signal intended to be sent to that terminal is received with a sufficient (positive real) amplitude  $S_b(i, i)$ . The fact that  $S_b$  has zero off-diagonal elements means that at the  $i^{th}$  remote terminal, none of the other signals being transmitted are received by that remote terminal. In this manner, each remote terminal receives only the signals intended for it at the necessary power levels to ensure proper communications. In alternate embodiments, uncertainties in the estimates of  $A_{rb}$  are incorporated in setting base station transmit power levels and calculating weights so as to minimize the effect of errors and/or changes in  $A_{rb}$ .

Similarly, at the base station the particular demultiplexing weight matrices given in (13) have the property that conditioned on the knowledge of the receive spatial signatures and the transmitted voltages (powers) from the remote terminals, the estimated signals  $\hat{S}$  given by:

$$\hat{S} = W_{rx}^* z_b, \quad (17)$$

are the most accurate in the sense of least mean-squared error. In particular, they most closely match the signals transmitted by the remote terminals given the measurements made at the base station by the multiple antenna elements.

Equations (9) and (13) represent only one way to calculate spatial multiplexing and demultiplexing weights. There are other similar strategies that demonstrate properties similar to those shown in equation (16) and described in the previous paragraph. Other well known techniques for calculating weight matrices

$W_{rr}$  and  $W_{rr}$  account for uncertainty in spatial signature matrices  $A_{rb}$  and  $A_{br}$ , for wide bandwidth conventional channels, and can incorporate more complex power and dynamic range constraints.

### Determining Spatial Signatures

As shown in figure 6, spatial processor 13 also contains a spatial signature processor 38 for finding the spatial signatures of the remote terminals. In the illustrative embodiment, spatial signature processor 38 uses the calibration techniques described in copending U.S. patent application 08/234,747.

In the illustrative embodiment, each remote terminal is capable of entering a calibration mode in which the signal received by the remote terminal 43 is transmitted back to base station 1. Referring to figure 7, this function is provided by switch 63 controlled by remote terminal CPU 62 through switch control signal 64.

To determine the transmit and receive spatial signatures of a remote terminal, spatial signature processor 38 commands the remote terminal to enter calibration mode by transmitting a command to it on the downlink channel. This command is generated by base station controller 3, based on a request from spatial processor controller 33, and modulated by signal modulators 24. Spatial signature processor 38 then transmits predetermined calibration signals 11, on the conventional channel occupied by the remote terminal, by instructing multichannel transmitters 17(a, ..., m) via transmitter control data 31 and spatial processor controller 33. In the present embodiment, the  $m$  signals (for each antenna) among the predetermined calibration signals 11 are different frequency complex sinusoids. In another embodiment, the predetermined calibration signals 11 are any known, distinct, signals.

The remote terminal shown in figure 7 transmits back the signal received at the remote terminal. This transponded signal is received by multichannel receivers 15 in base station 1 shown in figure 1 and supplied to spatial signature processor 38 shown in figure 6. In one embodiment described in patent application 08/234,747, spatial signature processor 38 computes the receive and transmit spatial signatures of the remote terminal from the received signal measurements 6 and predetermined calibration signals 11 as follows: Time samples of the received data are stored in an  $m$  by  $n$  data matrix  $Z$  which in the absence of noise and parameter offsets is given by

$$Z = k a_{br} a_{rb} S, \quad (18)$$

where  $S$  is the  $m$  by  $n$  matrix of predetermined calibration signals and  $k$  is a known amount by which the signal is amplified in the remote terminal before transmission back to the base station. The receive spatial signature is proportional to the singular vector ( $u_1$ ) corresponding to the largest singular value ( $\sigma_{max}$  of the data matrix  $Z$ ). Transmission of a unit power signal from the remote terminal and received by the base station at antenna element 1 provides the necessary scaling  $g_{br}$  for the receive spatial signature

$$a_{br} = g_{br} u_1 / u_1(1), \quad (19)$$

where  $u_1(1)$  is the first element of  $u_1$ . Once  $a_{br}$  is known,  $a_{rb}$  is calculated by

$$a_{rb} = k^{-1} (g_{br} u_1 / u_1(1))^{\dagger} Z S^{\dagger}, \quad (20)$$

where  $B^{\dagger}$  is the well known Moore-Penrose pseudo-inverse of the matrix  $B$  satisfying  $B B^{\dagger} = I$  (the identity matrix) for full-rank matrices  $B$  having more columns than rows.  $B^{\dagger} B = I$  for full-rank matrices  $B$  having more rows than columns. In alternate embodiments also described in copending application 08/234,747.

well known techniques are used to account for noise present in the system and parameter variations such as oscillator frequency offsets.

Spatial signature processor 38 stores the new spatial signatures in remote terminal database 36. Upon completion, spatial signature processor 38 commands the remote terminal to exit calibration mode by transmitting a command to it on the downlink channel.

In one alternate embodiment, computation of remote terminal transmit spatial signatures can be performed directly by the remote terminals. This embodiment of the remote terminal is shown in figure 8. In calibration mode, spatial signature processor 38 transmits predetermined calibration signals 11, on the conventional channel to be calibrated by the remote terminals, as before. Remote terminal CPU 62 uses received calibration signals 44 and the known transmitted waveforms to compute the remote terminal's transmit spatial signature using the same techniques used by spatial signature processor 38 in the previous embodiment. The computed transmit spatial signature is transmitted back to base station 1 through modulator 51 and transmitter 54 as control data to be transmitted 52. When received by base station 1, spatial signature processor 38 stores the new transmit spatial signature in remote terminal database 36. Since each remote terminal performs the transmit spatial signature calculation independently, this arrangement allows multiple remote terminals to compute their own transmit spatial signature simultaneously on the same conventional channel. In this embodiment, remote terminal receive spatial signatures are computed by spatial signature processor 38 in the same manner as in the previous embodiment.

Using these techniques, spatial signature processor 38 can measure a remote terminal transmit and receive spatial signatures for a particular channel any time that channel is idle. The efficiency of these calibration techniques allow spatial signature processor 38 to update the spatial signatures of numerous remote terminals for a particular channel while occupying that channel for only a short time.

Many other techniques for obtaining spatial signatures of remote terminals are also available. In some RF environments, spatial signatures for remote terminals can be determined using well-known techniques that depend upon knowledge of the geometric arrangement of the  $m$  reception antennas 19(a....m) and their individual directivity patterns (element gain and phase, with respect to a reference, as a function of angle-of-arrival), and the direction from the base station to the remote terminal. Furthermore, techniques such as ESPRIT (U.S. patents 4,750,147 and 4,965,732) can be used to estimate directions in applications where they are not known a priori.

Similarly, as is well known, knowledge of any predetermined modulation format parameters of the underlying signals being transmitted by the remote terminals (for example, knowledge of certain training or preamble sequences, or knowledge that the signals are constant modulus) can also be used to determine the receive spatial signatures for remote terminals. A further example is decision-directed feedback techniques, also well known in the art, where receive data is demodulated and then remodulated to produce an estimate of the original modulated signal. These techniques allow receive spatial signatures to be estimated even when multiple remote terminals are occupying a single conventional channel.

In some RF environments, transmit spatial signatures for remote terminals can be calculated explicitly, as is well known, using knowledge of the remote terminal locations and the locations and directivity patterns of the base station transmit antennas. This requires no special capability on the part of the remote terminal.

If the remote terminal has the ability to measure and report the strength of the signal it is receiving, the system can use this information to derive transmit spatial signatures, albeit in a less efficient manner than the embodiment shown in figure 7 where the remote terminal has full transponder capabilities, or the

embodiment shown in figure 8 where the remote terminal directly computes its transmit spatial signature. The transmit spatial signature is determined based solely on received signal power reports from the remote terminal as follows. First, spatial signature processor 38 transmits identical unit power signals from two of the  $m$  antenna elements at a time. Spatial signature processor 38 then changes the amplitude and phase of one of the two signals until the remote terminal reports that it is receiving no signal. The set of complex weights for antenna elements 2 through  $m$  required to null a unit power signal from element 1 are changed in sign and inverted to produce the transmit spatial signature for the remote terminal.

In yet another embodiment, the system can be designed to continuously update the spatial signatures of the remote terminals in a "closed loop" manner. This is done to account for the time variation of spatial signatures due to, for example, motion of the remote terminal or changes in the RF propagation conditions. To do this, both the base station and the remote terminal periodically transmit predetermined training sequences. Each remote terminal currently active on a particular channel is assigned a different predetermined training sequence and is given the training sequences for all other remotes currently active on that particular channel. In one embodiment, the different training sequences are orthogonal in the sense that the inner product of any two of the training sequence waveforms is zero. Each time the training sequences are transmitted, each remote terminal calculates how much of each training sequence it has received using well known techniques, and transmits this information to the base station.

In the illustrative embodiment, the base station uses the receiver outputs and knowledge of the transmitted waveforms to calculate the remote terminal receive spatial signatures. In another embodiment, the base station calculates how much of each remotely transmitted training sequence has come through on each output of the spatial demultiplexer, expressed as a complex vector of coupling coefficients. Knowledge of these coupling coefficients allows the currently active receive and transmit spatial signatures to be corrected so as to reduce mutual interference using well known techniques.

Finally, in systems that use time division duplexing (TDD) for full-duplex communications, as is well known in the art, the transmit and receive frequencies are the same. In this case, using the well known principle of reciprocity, the transmit and receive spatial signatures are directly related. Thus, this embodiment determines only one of the signatures, for example the receive spatial signature, and the other, in this case the transmit spatial signature, is calculated from the first (receive) spatial signature and knowledge of the relative phase and amplitude characteristics of multichannel receivers 15 and multichannel transmitters 14.

#### Network Level Spatial Processing

In the embodiment illustrated herein, the spatial processor for each base station in the cellular-like wireless communication system operates independently to maximize the number of communication channels in the immediate cell. However, significant system capacity improvements can be realized if the spatial processor from each base station communicates with and coordinates its efforts with the spatial processors from other nearby cells. A specific embodiment is shown in figure 9.

A multiple base station controller 66 acts as the interface between the wide area network 65 through link 68 and base stations 1 (a,b,c) via base station communication links 2 (a,b,c). Each base station is responsible for providing coverage to a number of remote terminals. In one embodiment, each remote terminal is assigned to only one base station thus defining cell boundaries 67 (a,b,c) within which all

remotes attached to a particular base station are located. Users equipped with remote terminals 69 are identified by a boxed "R" in the figure.

Each spatial processor contained in base stations 1 (a,b,c) measures and stores the spatial signatures of the remote terminals in its cell and also of the remote terminals in adjacent cells. The determination of spatial signatures of the remote terminals in adjacent cells is coordinated by multiple base station controller 66 through base station communication links 2 (a,b,c). Through base station communication links 2 (a,b,c) and multiple base station controller 66, spatial processors in base stations 1 (a,b,c) from adjacent cells inform each other of which remote terminals they are communicating with on which conventional channels. Each spatial processor includes the spatial signatures of remote terminals that are currently active in adjacent cells to form extended transmit and receive spatial signature matrices  $A_{TA}$  and  $A_{BR}$  which are sent to all the adjacent base stations. The channel selectors in each base station, using these extended spatial signature matrices, jointly assign remote terminals to each conventional channel in each of base stations 1 (a,b,c).

The resultant weight matrices  $W_{TX}$  and  $W_{RX}$  for each base station are then calculated using extended spatial signature matrices  $A_{TA}$  and  $A_{BR}$ . In calculating the weights, the objective is to minimize the signal transmitted to and received from the adjacent cell's active remote terminals, thereby allowing many more remote terminals to simultaneously communicate.

In an alternate embodiment, multiple base station controller 66 assigns remote terminals requesting access to base stations dynamically using a list of active remote terminal/base station/conventional channel links, the associated remote terminal databases, and the particular requirements for the link to be assigned. Additionally, remote terminals can employ multiple (directional) transmit and receive antennas, to facilitate directive links to multiple nearby base stations as instructed by multiple base station controller 66 to further increase system capacity.

#### *Advantages*

The apparatus and method in accordance with the invention provides a significant advantage over the prior art in that it allows many remote terminals to simultaneously share the same conventional communication channel. In particular, for a system with  $m$  receive and  $m$  transmit antenna elements, up to  $m$  remote terminals can share a single conventional communication channel. Moreover, signals received from and transmitted to the remote terminals have substantially improved signal-to-noise, reduced interference, and improved quality in multipath environments compared to a standard base station.

Thus, a wireless communication system can support many times more conversations, or have a much greater data throughput, with the same amount of spectrum. Alternatively, a wireless communication system can support the same number of conversations or data throughput with much less spectrum.

#### *Alternate Embodiments*

In one alternate embodiment, transmission antennas 18(a,...,m) and reception antennas 19(a,...,m) at base station 1 are replaced by a single array of  $m$  antennas. Each element in this array is attached to both its respective component of multichannel transmitters 14 and its respective component of multichannel receivers 15 by means of a duplexer.

In another alternate embodiment, signals on the uplink control channel may be processed in real time using the spatial processing described in copending patent application 07/806,695. This would allow multiple remote terminals to request a communication channel at the same time.

In yet another embodiment for applications involving data transfer of short bursts or packets of data, no separate uplink control channel is required and the system may service requests for communication and other control functions during control time intervals that are interspersed with communications intervals.

As stated above, many techniques are known for measuring the spatial signatures of the remote terminal radios and using these spatial signatures to calculate multiplexing and demultiplexing weights that will allow multiple simultaneous conversations and/or data transfers on the same conventional communication channel.

While the above description contains many specificities, these should not be construed as limitations on the scope of the invention, but rather as an exemplification of one preferred embodiment thereof. Many other variations are possible. Accordingly, the scope of the invention should be determined not by the illustrated embodiments, but by the appended claims and their legal equivalents.

**What is claimed is:**

1. A wireless system at a base station for receiving uplink signals transmitted from a plurality of remote terminals using a common conventional uplink channel comprising:

receiving means including a plurality of antenna elements and receivers for producing measurements of combinations of said uplink signals,

receive spatial processing means for determining and storing receive spatial signatures for said plurality of remote terminals using said measurements, and

spatial demultiplexing means using said receive spatial signatures and said measurements to produce separated uplink signals,

whereby said uplink signals from said plurality of remote terminals can be received independently while simultaneously communicating on said common conventional uplink channel.

2. The wireless system as defined by claim 1 wherein said receive spatial processing means comprises:

a receive spatial signature list comprising a receive spatial signature for each of said remote terminals and said common conventional uplink channel,

receive spatial signature determining means for determining said receive spatial signatures,

a receive channel selector utilizing said receive spatial signatures to determine whether said common conventional uplink channel can be further shared by an additional remote terminal, and

a receive spatial weight processor for calculating spatial demultiplexing weights for said plurality of remote terminals, said spatial demultiplexing weights being utilized by said spatial demultiplexing means to produce said separated uplink signals.

3. The wireless system as defined by claim 2 wherein said receive spatial weight processor determines said spatial demultiplexing weights as the columns of matrix  $W_{rr}$  as follows:

$$W_{rr} = (A_{br} P_r A_{br}^* + R_{nn})^{-1} A_{br} P_r,$$

where  $()^*$  denotes the complex conjugate transpose of a matrix,  $R_{nn}$  is a base station receiver noise covariance matrix,  $P_r$  is a diagonal matrix of remote terminal transmit powers, and  $A_{br}$  is a demultiplexing spatial signature matrix whose columns are said receive spatial signatures for said plurality of remote terminals and said common conventional uplink channel.

4. The wireless system as defined by claim 1 wherein said common conventional uplink channel is one of a plurality of conventional uplink channels and wherein said receive spatial processing means comprises:

a receive active remote terminal list of remote terminals assigned to each of said conventional uplink channels,

a receive spatial signature list comprising a receive spatial signature for each of said remote terminals and each of said conventional uplink channels,

receive spatial signature determining means for determining said receive spatial signatures,

a receive channel selector using said receive active remote terminal list and said receive spatial signature list to determine assignments of said remote terminals to said conventional uplink channels, and

a receive spatial weight processor for calculating spatial demultiplexing weights for each of said remote terminals assigned to each of said conventional uplink channels said spatial demultiplexing weights being utilized by said spatial demultiplexing means to produce said separated uplink signals.

5. The wireless system as defined by claim 4 wherein said base station is one of a plurality of base stations and said channel selector at each of said base stations further comprises:

communication means for communicating with said channel selector at each of said base stations, and

joint channel selector means for jointly determining assignments of said remote terminals to said conventional uplink channels and said base stations.

whereby said uplink signals from a maximum number of said remote terminals can be received independently by at least one of said base stations while simultaneously communicating on said common conventional uplink channels.

6. The wireless system as defined by claim 1 and including transmission means comprising a transmitter and an omnidirectional antenna for sending downlink signals from said base station to said plurality of remote terminals.
7. The wireless system as defined by claim 1 wherein said spatial demultiplexing means calculates spatial demultiplexing weights for said common conventional uplink channel as the columns of a matrix  $W_{rr}$  as follows:

$$W_{rr} = (A_{br} P_r A_{br}^* + R_{nn})^{-1} A_{br} P_r$$

where  $(\cdot)^*$  denotes the complex conjugate transpose of a matrix,  $(\cdot)^{-1}$  denotes the inverse of a matrix,  $R_{nn}$  is a base station receiver noise covariance matrix,  $P_r$  is a diagonal matrix of remote terminal transmit powers, and  $A_{br}$  is a demultiplexing spatial signature matrix whose columns are said receive spatial signatures for said plurality of remote terminals and said common conventional uplink channel, said spatial demultiplexing means using said spatial demultiplexing weights to produce said separated uplink signals.

8. The wireless system as defined by claim 1 wherein said receive spatial processing means determines said receive spatial signatures using signals transponded from transponders co-located with each of said plurality of remote terminals.
9. The wireless system as defined by claim 1 wherein said receive spatial processing means determines said receive spatial signatures using location and directivity knowledge of said antenna elements, and the directions of arrival of said uplink signals from said plurality of remote terminals.



10. The wireless system as defined by claim 1 wherein said receive spatial processing means determines said receive spatial signatures using location and directivity knowledge of said antenna elements and location knowledge of said plurality of remote terminals.
11. The wireless system as defined by claim 1 wherein said receive spatial processing means determines said receive spatial signatures using predetermined modulation format parameters of said uplink signals from said plurality of remote terminals.
12. The wireless system as defined by claim 1 further comprising:
  - transmission means including a plurality of transmit antenna elements and transmitters for transmitting multiplexed downlink signals to said plurality of remote terminals using a common conventional downlink channel,
  - transmit spatial processing means for determining and storing transmit spatial signatures for said plurality of remote terminals, and
  - spatial multiplexing means using said transmit spatial signatures and downlink signals to produce said multiplexed downlink signals,whereby said base station can transmit said downlink signals to said plurality of remote terminals independently and simultaneously on said common conventional downlink channel.
13. The wireless system as defined by claim 12 wherein said receiving means and said transmission means share common antenna elements using duplexers.
14. The wireless system as defined by claim 12 wherein said receiving means and said transmission means share common antenna elements using transmit/receive switches.
15. The wireless system as defined by claim 12 wherein said common conventional uplink channel is one of a plurality of conventional uplink channels, said common conventional downlink channel is one of a plurality of conventional downlink channels, and wherein said receive spatial processing means and said transmit spatial processing means comprises:
  - an active remote terminal list of remote terminals assigned to each of said conventional uplink channels and each of said conventional downlink channels,
  - a spatial signature list comprising a receive spatial signature for each of said remote terminals and each of said conventional uplink channels, and a transmit spatial signature for each of said remote terminals and each of said conventional downlink channels,
  - receive spatial signature determining means for determining said receive spatial signatures,
  - transmit spatial signature determining means for determining said transmit spatial signatures,
  - a channel selector using said active remote terminal list and said receive spatial signature list and said transmit spatial signature list to determine assignments of said remote terminals to said conventional uplink channels and said conventional downlink channels,

- a receive spatial weight processor for calculating spatial demultiplexing weights for each of said remote terminals assigned to each of said conventional uplink channels, said spatial demultiplexing weights being utilized by said spatial demultiplexing means to produce said separated uplink signals, and
- a transmit spatial weight processor for calculating spatial multiplexing weights for each of said remote terminals assigned to each of said conventional downlink channels, said spatial multiplexing weights being utilized by said spatial multiplexing means to produce said multiplexed downlink signals.
16. The wireless system as defined by claim 15 wherein said base station is one of a plurality of base stations and said channel selector at each of said base stations further comprises:
- communication means for communicating with said channel selector at each of said base stations, and
- joint channel selector means for jointly determining assignments for said remote terminals to said conventional uplink channels and said conventional downlink channels and said base stations,
- whereby said uplink signals from a maximum number of said remote terminals can be received independently by at least one of said base stations and said downlink signals can be transmitted independently to a maximum number of said remote terminals by at least one of said base stations, while simultaneously communicating on said common conventional uplink channels and said common conventional downlink channels.
17. The wireless system as defined by claim 12 wherein said spatial multiplexing means determines spatial multiplexing weights for said common conventional downlink channel as the rows of a matrix  $W_{tr}$  as follows:
- $$W_{tr} = S_b(A_{rb}A_{rb}^*)^{-1}A_{rb},$$
- where  $(\cdot)^*$  denotes the complex conjugate transpose of a matrix,  $(\cdot)^{-1}$  denotes the inverse of a matrix,  $S_b$  is a diagonal matrix of amplitudes of said downlink signals, and  $A_{rb}$  is a multiplexing spatial signature matrix whose rows are said transmit spatial signatures for said plurality of remote terminals and said common conventional downlink channel and said spatial multiplexing means utilizes said spatial multiplexing weights to produce said multiplexed downlink signals.
18. The wireless system as defined by claim 12 wherein said transmit spatial processing means determines said transmit spatial signatures using signals transponded from transponders co-located with said plurality of remote terminals.
19. The wireless system as defined by claim 12 wherein said transmit spatial processing means determines said transmit spatial signatures using signals transponded by said plurality of remote terminals.
20. The wireless system as defined by claim 12 wherein said transmit spatial signatures are determined by said plurality of remote terminals using predetermined modulation format parameters of said downlink signals.

21. The wireless system as defined by claim 12 wherein said transmit spatial processing means determines said transmit spatial signatures using knowledge of locations and directivity of said transmit antenna elements and estimates of directions of arrival of said uplink signals from said plurality of remote terminals.
22. The wireless system as defined by claim 12 wherein said downlink signals and said uplink signals are transmitted on the same radio frequency and said transmit spatial processing means determines said transmit spatial signatures by calculating them directly from said receive spatial signatures.
23. The wireless system as defined by claim 12 wherein said transmit spatial processing means determines said transmit spatial signatures using location and directivity knowledge of said antenna elements and location knowledge of said plurality of remote terminals.
24. A wireless system at a base station for transmitting to a plurality of remote terminals using a common conventional downlink channel comprising:
- transmission means including a plurality of transmit antenna elements and transmitters for transmitting multiplexed downlink signals to said plurality of remote terminals.
  - transmit spatial processing means for determining and storing transmit spatial signatures for said plurality of remote terminals, and
  - spatial multiplexing means using said transmit spatial signatures and downlink signals to produce said multiplexed downlink signals.
- whereby said base station can transmit said downlink signals to said plurality of remote terminals independently and simultaneously on a common conventional downlink channel.
25. The wireless system as defined by claim 24 wherein said common conventional downlink channel is one of a plurality of conventional downlink channels and wherein said transmit spatial processing means comprises:
- a transmit active remote terminal list of remote terminals assigned to each of said conventional downlink channels.
  - a transmit spatial signature list comprising a transmit spatial signature for each of said remote terminals and each of said conventional downlink channels.
  - transmit spatial signature determining means for determining said transmit spatial signatures.
  - a transmit channel selector using said transmit active remote terminal list and said transmit spatial signature list to determine assignments of said remote terminals to said conventional downlink channels, and
  - a transmit spatial weight processor for calculating spatial multiplexing weights for each of said remote terminals assigned to each of said conventional downlink channels said spatial multiplexing weights being utilized by said spatial multiplexing means to produce said multiplexed downlink signals.

26. The wireless system as defined by claim 25 wherein said base station is one of a plurality of base stations and said transmit channel selector at each of said base stations further comprises:

communication means for communicating with said transmit channel selector at each of said base stations, and

joint channel selector means for jointly determining assignments of said remote terminals to said conventional downlink channels and said base stations,

whereby said downlink signals can be transmitted independently to a maximum number of said remote terminals by at least one of said base stations, while simultaneously communicating on said common conventional downlink channels.

27. The wireless system as defined by claim 24 wherein said spatial multiplexing means determines spatial multiplexing weights for said common conventional downlink channel as the rows of a matrix  $W_{tr}$  as follows:

$$W_{tr} = S_b(A_{rb}A_{rb}^*)^{-1}A_{rb},$$

where  $(\cdot)^*$  denotes the complex conjugate transpose of a matrix,  $(\cdot)^{-1}$  denotes the inverse of a matrix,  $S_b$  is a diagonal matrix of amplitudes of said downlink signals, and  $A_{rb}$  is a multiplexing spatial signature matrix whose rows are said transmit spatial signatures for said plurality of remote terminals and said common conventional downlink channel and said spatial multiplexing means utilizes said spatial multiplexing weights to produce said multiplexed downlink signals.

28. The wireless system as defined by claim 24 wherein said transmit spatial processing means determines said transmit spatial signatures using signals transponded from transponders co-located with said plurality of remote terminals.
29. The wireless system as defined by claim 24 wherein said transmit spatial processing means determines said transmit spatial signatures using signals transponded by said plurality of remote terminals.
30. The wireless system as defined by claim 24 wherein said transmit spatial signatures are determined by said plurality of remote terminals using predetermined modulation format parameters of said downlink signals.
31. The wireless system as defined by claim 24 wherein said transmit spatial processing means determines said transmit spatial signatures using location and directivity knowledge of said antenna elements and location knowledge of said plurality of remote terminals.

## AMENDED CLAIMS

[received by the International Bureau on 23 April 1996 (23.04.96);  
original claims 1-31 replaced by amended claims 1-35 (12 pages)]

1                   1.    A wireless system for calculating uplink  
2                   signals transmitted from a plurality of remote terminals using  
3                   a common uplink channel, said system including at least one  
4                   base station, said system comprising:

5                   receiving means at said at least one base station  
6                   including a plurality of antenna elements and receivers for  
7                   producing measurements of combinations of said uplink signals  
8                   from said plurality of remote terminals using said common  
9                   uplink channel,

10                  receive spatial processing means for determining and  
11                  storing receive spatial signatures for said plurality of  
12                  remote terminals using said measurements, and

13                  spatial demultiplexing means using said receive  
14                  spatial signatures and said measurements to calculate said  
15                  uplink signals.

1                   2.    The wireless system as defined by claim 1  
2                   wherein said receive spatial processing means comprises:

3                   a spatial signature list comprising a receive  
4                   spatial signature for each remote terminal in said plurality  
5                   of remote terminals and said common uplink channel,

6                   receive spatial signature determining means for  
7                   determining said receive spatial signatures, and

8                   a receive channel selector utilizing said receive  
9                   spatial signatures to determine whether said common uplink  
10                  channel can be further shared by an additional remote  
11                  terminal.

1                   3.    The wireless system as defined by claim 2  
2                   wherein said receive spatial processing means further  
3                   comprises:

4                   a receive spatial weight processor for calculating  
5                   spatial demultiplexing weights for said plurality of remote  
6                   terminals, said spatial demultiplexing weights being utilized  
7                   by said spatial demultiplexing means to calculate said uplink  
8                   signals.

1                   4.    The wireless system as defined by claim 3  
2    wherein said receive spatial weight processor determines said  
3    spatial demultiplexing weights as the columns of matrix  $W_{rx}$  as  
4    follows:

$$W_{rx} = (A_{br} P_r A_{br}^* + R_{nn})^{-1} A_{br} P_r$$

5                   where  $()^*$  denotes the complex conjugate transpose of a matrix,  
6     $R_{nn}$  is the noise covariance matrix of said receiving means,  $P_r$   
7    is the diagonal matrix of transmit powers of the remote  
8    terminals in said plurality of remote terminals, and  $A_{br}$  is a  
9    demultiplexing spatial signature matrix whose columns are said  
10   receive spatial signatures for said plurality of remote  
11   terminals and said common uplink channel.  
12

1                   5.    The wireless system as defined by claim 1  
2    wherein said common uplink channel is one of a plurality of  
3    uplink channels and wherein said receive spatial processing  
4    means comprises:

5                    an active remote terminal list comprising a list of  
6    remote terminals assigned to at least one channel of said  
7    plurality of uplink channels,

8                    a spatial signature list comprising a receive  
9    spatial signature for each remote terminal of said plurality  
10   of remote terminals and each channel of said plurality of  
11   uplink channels,

12                   receive spatial signature determining means for  
13   determining said receive spatial signatures in said spatial  
14   signature list,

15                   a receive channel selector using said active remote  
16   terminal list and said spatial signature list to determine  
17   assignments of each remote terminal in said active remote  
18   terminal list to at least one of the channels of said  
19   plurality of uplink channels, and

20                   a receive spatial weight processor for calculating  
21   spatial demultiplexing weights for each of the terminals in  
22   said active remote terminal list and each channel of said  
23   plurality of uplink channels assigned to at least one of the  
24   terminals in said active remote terminal list, said spatial  
25   demultiplexing weights being utilized by said spatial  
26   demultiplexing means to calculate said uplink signals.

1                   6.     The wireless system as defined by claim 1  
2     wherein said common uplink channel is one of a plurality of  
3     uplink channels, said at least one base station is one of a  
4     plurality of base stations, said receive spatial processing  
5     means is one of a plurality of receive spatial processing  
6     means, each base station in said plurality of base stations  
7     having a corresponding receive spatial processing means in  
8     said plurality of receive spatial processing means, each  
9     receive spatial processing means in said plurality of receive  
10    spatial processing means comprising:

11                    an active remote terminal list comprising a list of  
12    remote terminals assigned to at least one channel of said  
13    plurality of uplink channels,

14                    a spatial signature list comprising a receive  
15    spatial signature for each remote terminal of said plurality  
16    of remote terminals and each channel of said plurality of  
17    uplink channels,

18                    receive spatial signature determining means for  
19    determining said receive spatial signatures in said spatial  
20    signature list, and

21                    a receive spatial weight processor for calculating  
22    spatial demultiplexing weights for each of the terminals in  
23    said active remote terminal list and each channel of said  
24    plurality of uplink channels assigned to at least one of the  
25    terminals in said active remote terminal list, said spatial  
26    demultiplexing weights being utilized by said spatial  
27    demultiplexing means to calculate said uplink signals,

28                    said system further comprising:

29                    joint channel selector means for jointly determining  
30    assignments of each remote terminal in each said active remote  
31    terminal list to at least one of the channels of said  
32    plurality of uplink channels and to at least one of base  
33    stations of said plurality of base stations, and

34                    communication means for communicating the status of  
35    said assignments between each base station in said plurality  
36    of base stations and said joint channel selector means.

1                   7.     The wireless system as defined by claim 1 and  
2     including transmission means comprising a transmitter and an  
3     antenna for sending downlink signals from said at least one

4 base station to the terminals in said plurality of remote  
5 terminals.

1 8. The wireless system as defined by claim 1  
2 wherein said spatial demultiplexing means calculates spatial  
3 demultiplexing weights for said common uplink channel as the  
4 columns of a matrix  $W_{rx}$  as follows:

$$W_{rx} = (A_{br} P_r A_{br}^* + R_{nn})^{-1} A_{br} P_r$$

5 where  $()^*$  denotes the complex conjugate transpose of a matrix,  
6  $R_{nn}$  is the noise covariance matrix of said receiver means,  $P_r$   
7 is the diagonal matrix of transmit powers of the remote  
8 terminals in said plurality of remote terminals, and  $A_{br}$  is a  
9 demultiplexing spatial signature matrix whose columns are said  
10 receive spatial signatures for said plurality of remote  
11 terminals and said common uplink channel, said spatial  
12 demultiplexing means using said spatial demultiplexing weights  
13 to calculate said uplink signals.  
14

1 9. The wireless system as defined by claim 1  
2 wherein said system includes a transponder co-located with  
3 each remote terminal of said plurality of remote terminals and  
4 wherein receive spatial processing means determines said  
5 receive spatial signatures using signals transponded from at  
6 least one of the transponders.

1 10. The wireless system as defined by claim 1  
2 wherein each remote terminal of said plurality of remote  
3 terminals includes a transponder and said receive spatial  
4 processing means determines said receive spatial signatures  
5 using signals transponded from at least one of the  
6 transponders.

1 11. The wireless system as defined by claim 1  
2 wherein said receive spatial processing means determines said  
3 receive spatial signatures using the known location and  
4 directivity of said antenna elements, and estimates of the  
5 directions of arrival of said uplink signals from said  
6 plurality of remote terminals.



1           12. The wireless system as defined by claim 1  
2 wherein said receive spatial processing means determines said  
3 receive spatial signatures using the known location and  
4 directivity of said antenna elements and the known location of  
5 said plurality of remote terminals.

1           13. The wireless system as defined by claim 1  
2 wherein said uplink signals have predetermined modulation  
3 format parameters, and said receive spatial processing means  
4 determines said receive spatial signatures using said  
5 predetermined modulation format parameters of said uplink  
6 signals from said plurality of remote terminals.

1           14. The wireless system as defined by claim 1  
2 further comprising:

3           transmission means including a plurality of transmit  
4 antenna elements and transmitters for transmitting multiplexed  
5 downlink signals to said plurality of remote terminals using a  
6 common downlink channel,

7           transmit spatial processing means for determining  
8 and storing transmit spatial signatures for said plurality of  
9 remote terminals, and

10          spatial multiplexing means using said transmit  
11 spatial signatures and downlink signals to produce said  
12 multiplexed downlink signals.

1           15. The wireless system as defined by claim 14  
2 wherein said receiving means and said transmission means share  
3 common antenna elements using duplexers.

1           16. The wireless system as defined by claim 14  
2 wherein said receiving means and said transmission means share  
3 common antenna elements using transmit/receive switches.

1           17. The wireless system as defined by claim 14  
2 wherein said common uplink channel is one of a plurality of  
3 uplink channels, said common downlink channel is one of a  
4 plurality of downlink channels, and wherein said receive  
5 spatial processing means and said transmit spatial processing  
6 means comprise:

7 an active remote terminal list comprising a list of  
8 remote terminals assigned to at least one of the channels of  
9 said plurality of uplink channels and remote terminals  
10 assigned to at least one of the channels of said plurality of  
11 downlink channels, a spatial signature list comprising a  
12 receive spatial signature for each remote terminal of said  
13 plurality of remote terminals and each channel of said  
14 plurality of uplink channels, and a transmit spatial signature  
15 for each remote terminal of said plurality of remote terminals  
16 and each channel of said plurality of downlink channels,  
17 receive spatial signature determining means for  
18 determining said receive spatial signatures,  
19 transmit spatial signature determining means for  
20 determining said transmit spatial signatures, and  
21 a channel selector using said active remote terminal  
22 list and said spatial signature list to determine assignments  
23 of each remote terminal in said active remote terminal list to  
24 at least one of the channels of said plurality of uplink  
25 channels and at least one of the channels of said plurality of  
26 downlink channels.

1 18. The wireless system as defined by claim 17  
2 wherein said receive spatial processing means and said  
3 transmit spatial processing means further comprise:

4 a receive spatial weight processor for calculating  
5 spatial demultiplexing weights for each of the terminals in  
6 said active remote terminals list to which a uplink channel is  
7 assigned and for each channel of said plurality of uplink  
8 channels assigned to at least one of the terminals in said  
9 active remote terminal list, said spatial demultiplexing  
10 weights being utilized by said spatial demultiplexing means to  
11 calculate said uplink signals, and

12 a transmit spatial weight processor for calculating  
13 spatial multiplexing weights for each of the terminals in said  
14 active remote terminal list to which a downlink channel is  
15 assigned and each channel of said plurality of downlink  
16 channels assigned to at least one of the terminals in said  
17 active remote terminal list, said spatial multiplexing weights  
18 being utilized by said spatial multiplexing means to produce  
19 said multiplexed downlink signals.

1                   19. The wireless system as defined by claim 14  
2                   wherein said at least one base station is one of a plurality  
3                   of base stations, said common uplink channel is one of a  
4                   plurality of uplink channels, said common downlink channel is  
5                   one of a plurality of downlink channels, said receive spatial  
6                   processing means is one of a plurality of receive spatial  
7                   processing means, said transmit spatial processing means is  
8                   one of a plurality of transmit spatial processing means, each  
9                   base station in said plurality of base stations having a  
10                  corresponding receive spatial processing means in said  
11                  plurality of receive spatial processing means and a  
12                  corresponding transmit spatial processing means in said  
13                  plurality of transmit spatial processing means, each receive  
14                  spatial processing means in said plurality of receive spatial  
15                  processing means and each transmit spatial processing means in  
16                  said plurality of transmit spatial processing means  
17                  comprising:

18                  an active remote terminal list comprising a list of  
19                  remote terminals assigned to at least one of the channels of  
20                  said plurality of uplink channels and remote terminals  
21                  assigned to at least one of the channels of said plurality of  
22                  downlink channels, a spatial signature list comprising a  
23                  receive spatial signature for each remote terminal of said  
24                  plurality of remote terminals and each channel of said  
25                  plurality of uplink channels, and a transmit spatial signature  
26                  for each remote terminal of said plurality of remote terminals  
27                  and each channel of said plurality of downlink channels,

28                  receive spatial signature determining means for  
29                  determining said receive spatial signatures,

30                  transmit spatial signature determining means for  
31                  determining said transmit spatial signatures,

32                  a receive spatial weight processor for calculating  
33                  spatial demultiplexing weights for each of the terminals in  
34                  said active remote terminal list to which a uplink channel is  
35                  assigned and each channel of said plurality of uplink channels  
36                  assigned to at least one of the terminals in said active  
37                  remote terminal list, said spatial demultiplexing weights  
38                  being utilized by said spatial demultiplexing means to  
39                  calculate said uplink signals, and

a transmit spatial weight processor for calculating spatial multiplexing weights for each of the terminals in said active remote terminal list to which a downlink channel is assigned and each channel of said plurality of downlink channels assigned to at least one of the terminals in said active remote terminal list, said spatial multiplexing weights being utilized by said spatial multiplexing means to produce said multiplexed downlink signals,

said system further comprising:

joint channel selector means for jointly determining assignments of each remote terminal in each said active remote terminal list to at least one of the channels of said plurality of uplink channels, to at least one of the channels of said plurality of downlink channels and to at least one of the base stations of said plurality of base stations, and

communication means for communicating said assignments between each base station in said plurality of base stations and said joint channel selector means.

20. The wireless system as defined by claim 14 wherein said spatial multiplexing means determines spatial multiplexing weights for said common downlink channel as the rows of a matrix  $W_{tx}$  as follows:

$$W_{tx} = S_b (A_{rb} A_{rb}^*)^{-1} A_{rb},$$

where  $()^*$  denotes the complex conjugate transpose of a matrix,  $S_b$  is the diagonal matrix of amplitudes of said downlink signals, and  $A_{rb}$  is a multiplexing spatial signature matrix whose rows are said transmit spatial signatures for said plurality of remote terminals and said common downlink channel, and wherein said spatial multiplexing means utilizes said spatial multiplexing weights to produce said multiplexed downlink signals.

21. The wireless system as defined by claim 14 wherein said system includes a transponder co-located with each remote terminal of said plurality of remote terminals and wherein transmit spatial processing means determines said transmit spatial signatures using signals transponded from at least one of the transponders.

1           22. The wireless system as defined by claim 14  
2 wherein each remote terminal in said plurality of remote  
3 terminals includes a transponder, and wherein said transmit  
4 spatial processing means determines said transmit spatial  
5 signatures using signals transponded from at least one of the  
6 transponders.

1           23. The wireless system as defined by claim 14  
2 wherein said downlink signals have predetermined modulation  
3 format parameters, and said transmit spatial signatures are  
4 determined by the corresponding terminals in said plurality of  
5 remote terminals using the predetermined modulation format  
6 parameters of said downlink signals.

1           24. The wireless system as defined by claim 14  
2 wherein said transmit spatial processing means determines said  
3 transmit spatial signatures using the known location and  
4 directivity of said transmit antenna elements and estimates of  
5 directions of arrival of said uplink signals from said  
6 plurality of remote terminals.

1           25. The wireless system as defined by claim 14  
2 wherein said downlink signals and said uplink signals are  
3 transmitted on the same radio frequency and said transmit  
4 spatial processing means determines said transmit spatial  
5 signatures by calculating them directly from said receive  
6 spatial signatures.

1           26. The wireless system as defined by claim 14  
2 wherein said transmit spatial processing means determines said  
3 transmit spatial signatures using the known location and  
4 directivity of said antenna elements and the known location of  
5 said plurality of remote terminals.

1           27. A wireless system including at least one base  
2 station for transmitting to a plurality of remote terminals  
3 using a common downlink channel, said system comprising:  
4           transmission means at said at least one base station  
5 including a plurality of transmit antenna elements and

transmitters for transmitting multiplexed downlink signals to said plurality of remote terminals,

transmit spatial processing means for determining transmit spatial signatures for said plurality of remote terminals, and

spatial multiplexing means using said transmit spatial signatures and downlink signals to produce said multiplexed downlink signals,

whereby said at least one base station can transmit said downlink signals to said plurality of remote terminals simultaneously on a common downlink channel.

28. The wireless system as defined by claim 27 wherein said common downlink channel is one of a plurality of downlink channels and wherein said transmit spatial processing means comprises:

an active remote terminal list comprising a list of remote terminals assigned to at least one the channels of said plurality of downlink channels,

a spatial signature list comprising a transmit spatial signature for each remote terminal of said plurality of remote terminals and each channel of said plurality of downlink channels,

transmit spatial signature determining means for determining said transmit spatial signatures, and

a transmit channel selector using said active remote terminal list and said spatial signature list to determine assignments of each remote terminal in said active remote terminal list to at least one of the channels of said plurality of downlink channels.

29. The wireless system as defined by claim 28 wherein said transmit spatial processing means further comprises:

a transmit spatial weight processor for calculating spatial multiplexing weights for each of the terminals in said active remote terminal list to which a downlink channel is assigned and each channel of said plurality of downlink channels assigned to at least one of the terminals in said active remote terminal list, said spatial multiplexing weights

10 being utilized by said spatial multiplexing means to produce  
11 said multiplexed downlink signals.

1 30. The wireless system as defined by claim 27  
2 wherein said at least one base station is one of a plurality  
3 of base stations, said common downlink channel is one of a  
4 plurality of downlink channels, said transmit spatial  
5 processing means is one of a plurality of transmit spatial  
6 processing means, each base station in said plurality of base  
7 stations having a corresponding transmit spatial processing  
8 means in said plurality of transmit spatial processing means,  
9 each transmit spatial processing means in said plurality of  
10 transmit spatial processing means comprising:

11 an active remote terminal list comprising a list of  
12 remote terminals assigned to at least one the channels of said  
13 plurality of downlink channels,

14 a spatial signature list comprising a transmit  
15 spatial signature for each remote terminal of said plurality  
16 of remote terminals and each channel of said plurality of  
17 downlink channels,

18 transmit spatial signature determining means for  
19 determining said transmit spatial signatures, and

20 a transmit spatial weight processor for calculating  
21 spatial multiplexing weights for each of the terminals in said  
22 active remote terminal list to which a downlink channel is  
23 assigned and each channel of said plurality of downlink  
24 channels assigned to at least one of the terminals in said  
25 active remote terminal list, said spatial multiplexing weights  
26 being utilized by said spatial multiplexing means to produce  
27 said multiplexed downlink signals,

28 said system further comprising:

29 joint channel selector means for jointly determining  
30 assignments of each remote terminal in each said active remote  
31 terminal list to at least one of the channels of said  
32 plurality of down channels and to at least one of the base  
33 stations of said plurality of base stations, and

34 communication means for communicating said  
35 assignments between each base station in said plurality of  
36 base stations and said joint channel selector means.

1           31. The wireless system as defined by claim 27  
2 wherein said spatial multiplexing means determines spatial  
3 multiplexing weights for said common downlink channel as the  
4 rows of a matrix  $W_{tx}$  as follows:

$$W_{tx} = S_b (A_{rb}^* A_{rb})^{-1} A_{rb}$$

5  
6 where  $()^*$  denotes the complex conjugate transpose of a matrix,  
7  $S_b$  is the diagonal matrix of amplitudes of said downlink  
8 signals, and  $A_{rb}$  is a multiplexing spatial signature matrix  
9 whose rows are said transmit spatial signatures for said  
10 plurality of remote terminals and said common downlink  
11 channel, and said spatial multiplexing means utilizes said  
12 spatial multiplexing weights to produce said multiplexed  
13 downlink signals.

1           32. The wireless system as defined by claim 27  
2 wherein said system includes a transponder co-located with  
3 each remote terminal of said plurality of remote terminals and  
4 wherein said transmit spatial processing means determines said  
5 transmit spatial signatures using signals transponded from at  
6 least one of the transponders.

1           33. The wireless system as defined by claim 27  
2 wherein each remote terminal in said plurality of remote  
3 terminals includes a transponder, and wherein said transmit  
4 spatial processing means determines said transmit spatial  
5 signatures using signals transponded from at least one of the  
6 transponders.

1           34. The wireless system as defined by claim 27  
2 wherein said downlink signals have predetermined modulation  
3 format parameters, and said transmit spatial signatures are  
4 determined by the corresponding terminals in said plurality of  
5 remote terminals using the predetermined modulation format  
6 parameters of said downlink signals.

1           35. The wireless system as defined by claim 27  
2 wherein said transmit spatial processing means determines said  
3 transmit spatial signatures using the known location and  
4 directivity of said antenna elements and the known location of  
5 said plurality of remote terminals.



Sheet 1 of 9

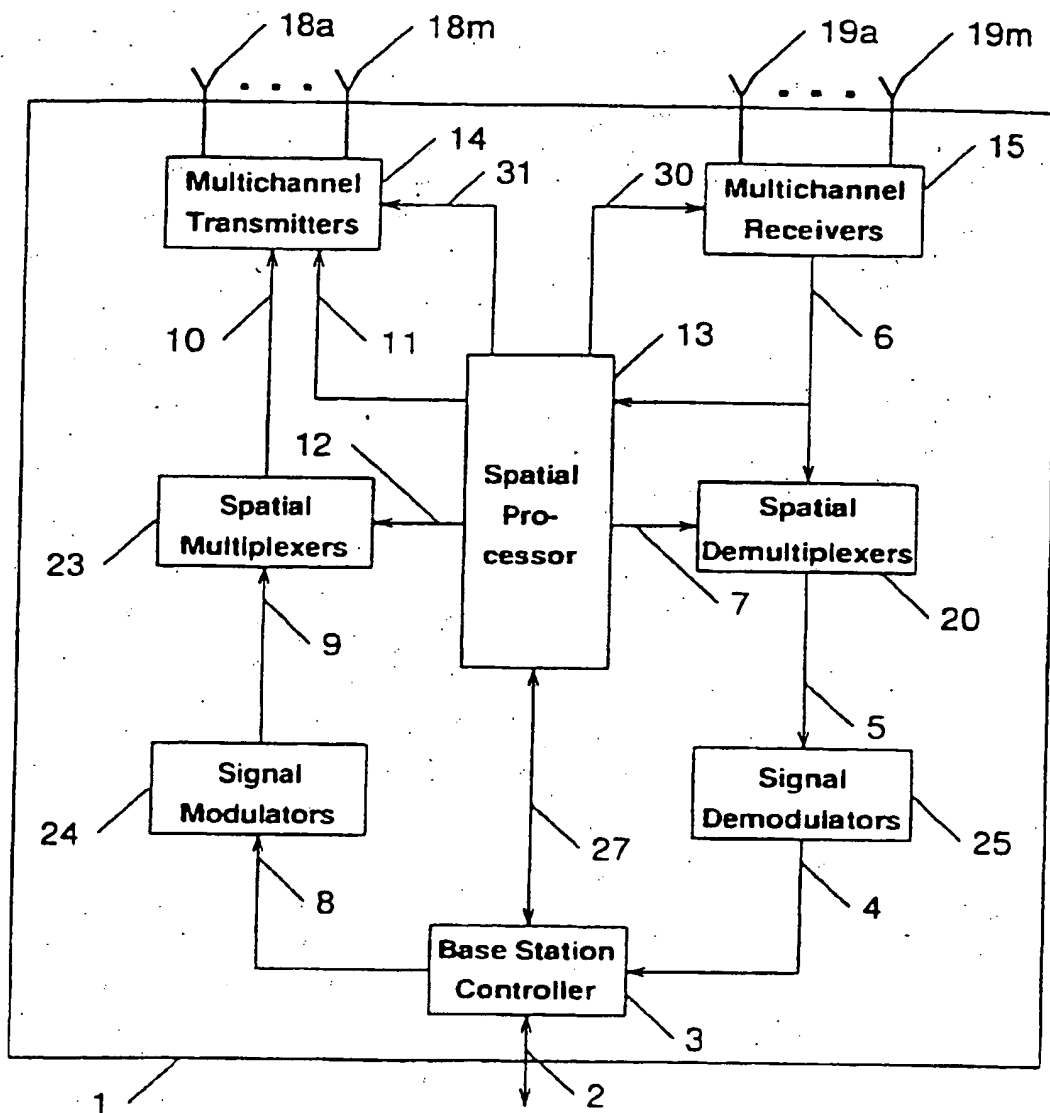


FIG. 1

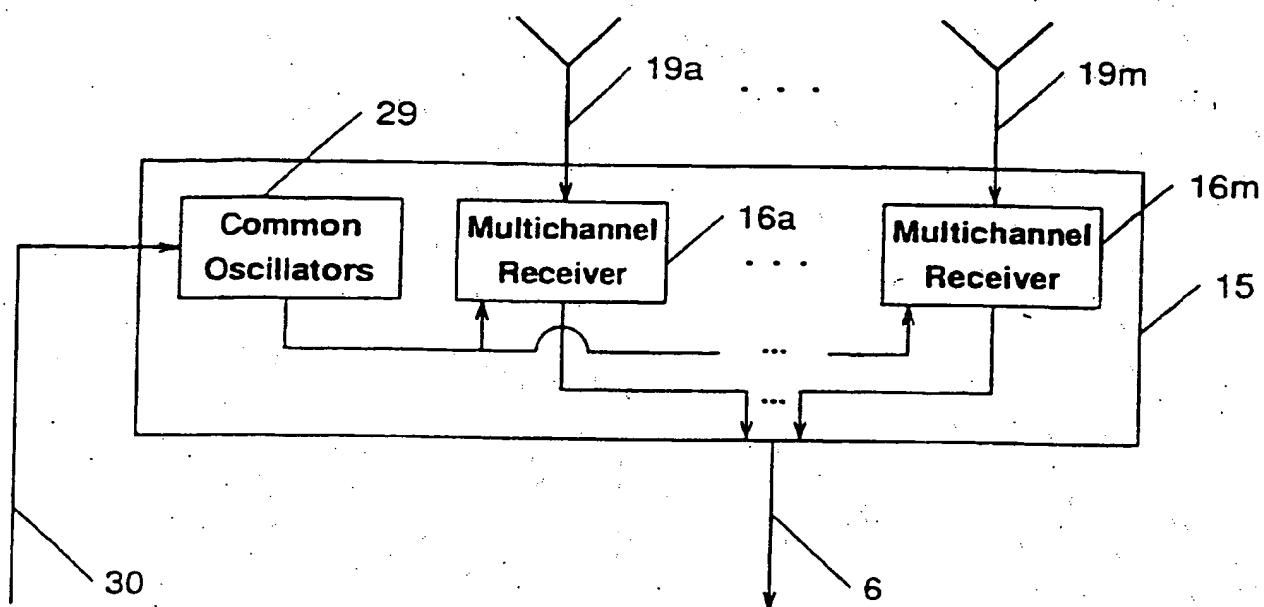


FIG. 2

Sheet 3 of 9

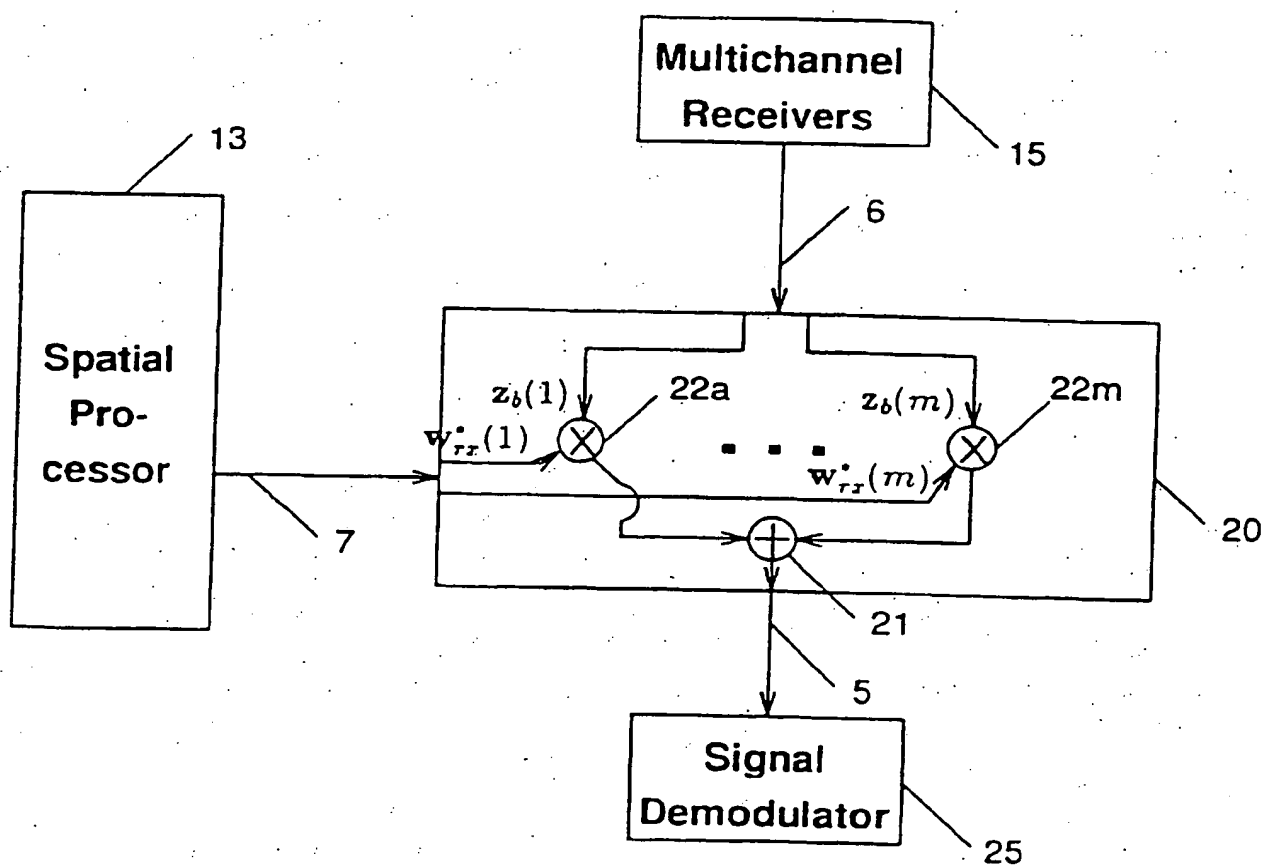


FIG. 3

Sheet 4 of 9

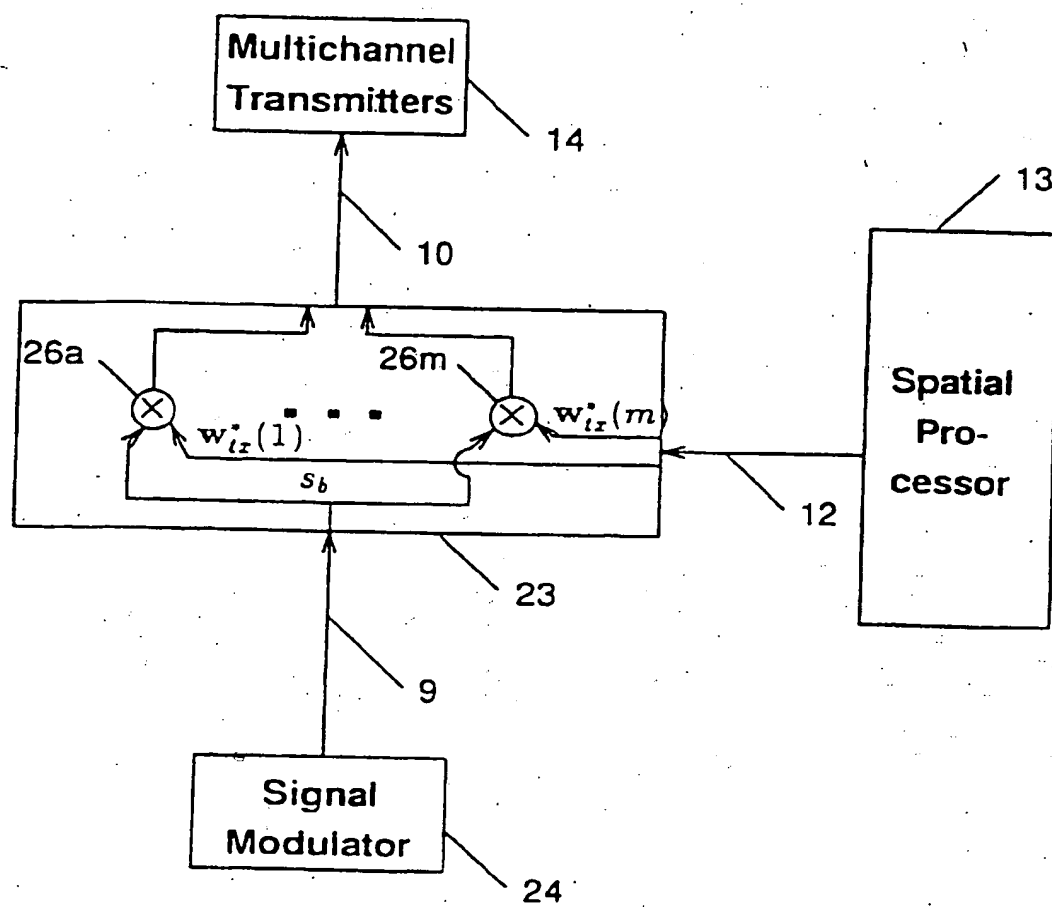


FIG. 4

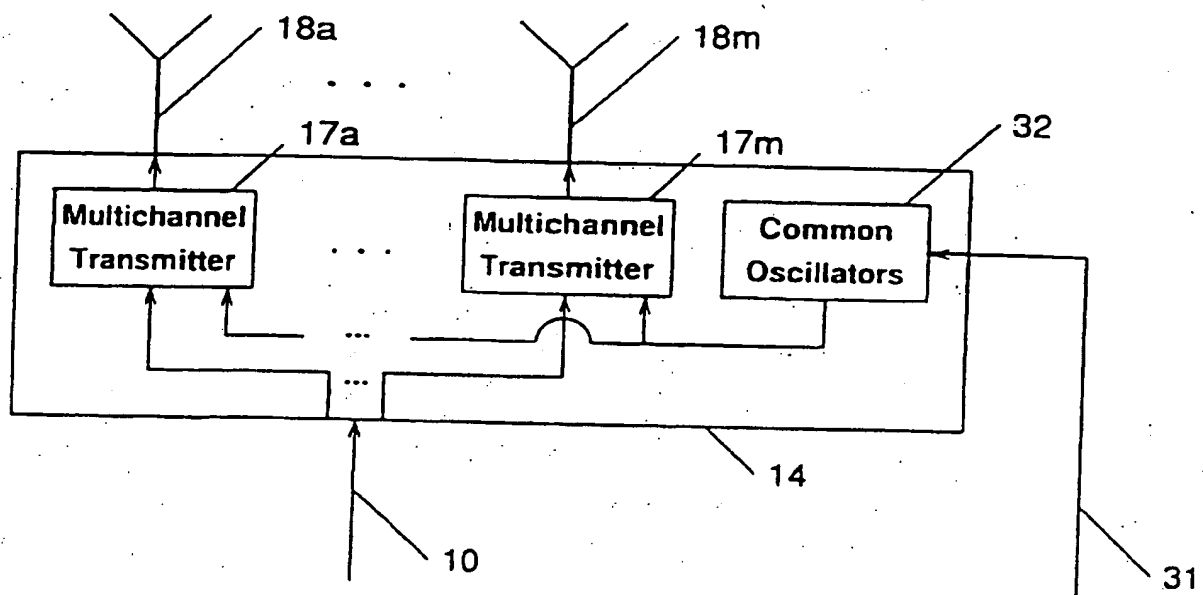


FIG. 5

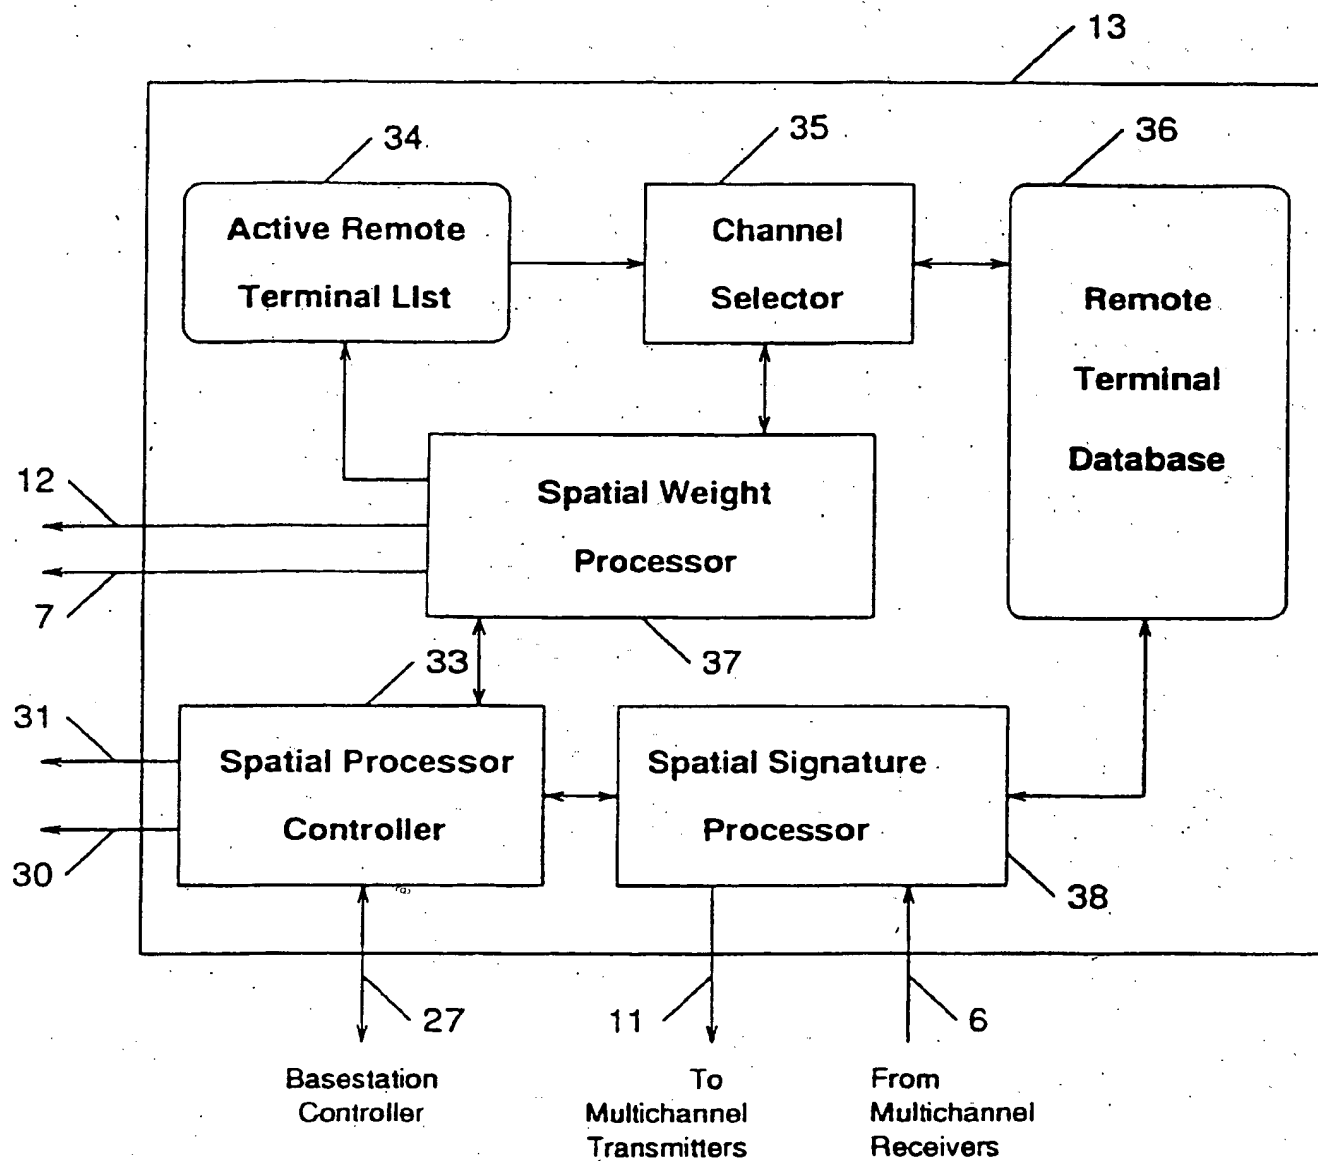


FIG. 6

Sheet 7 of 9

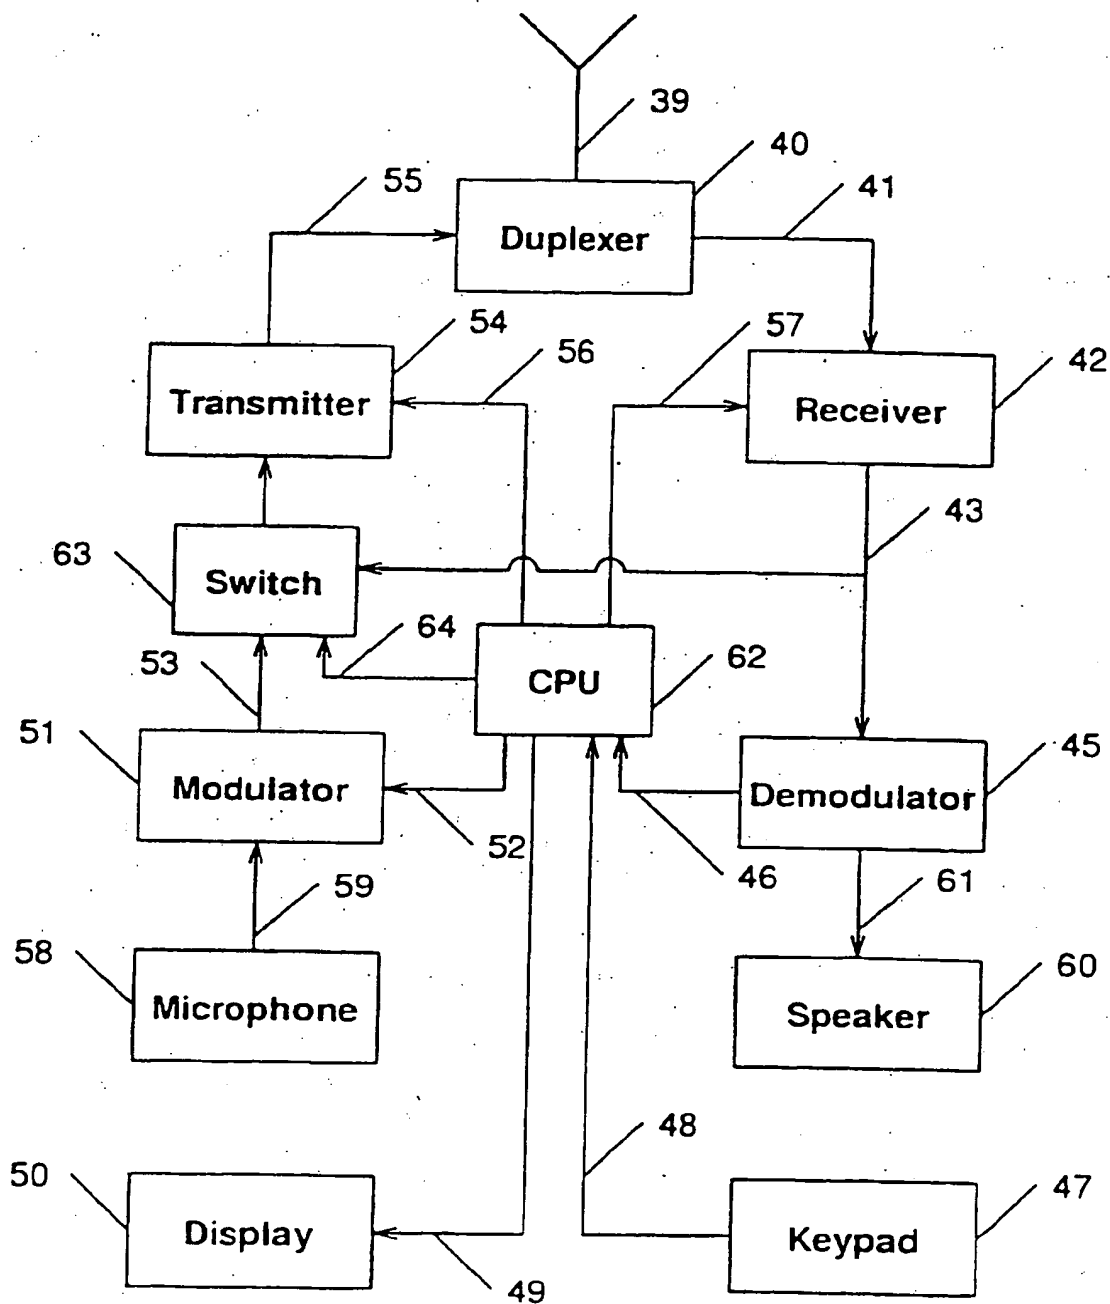


FIG. 7

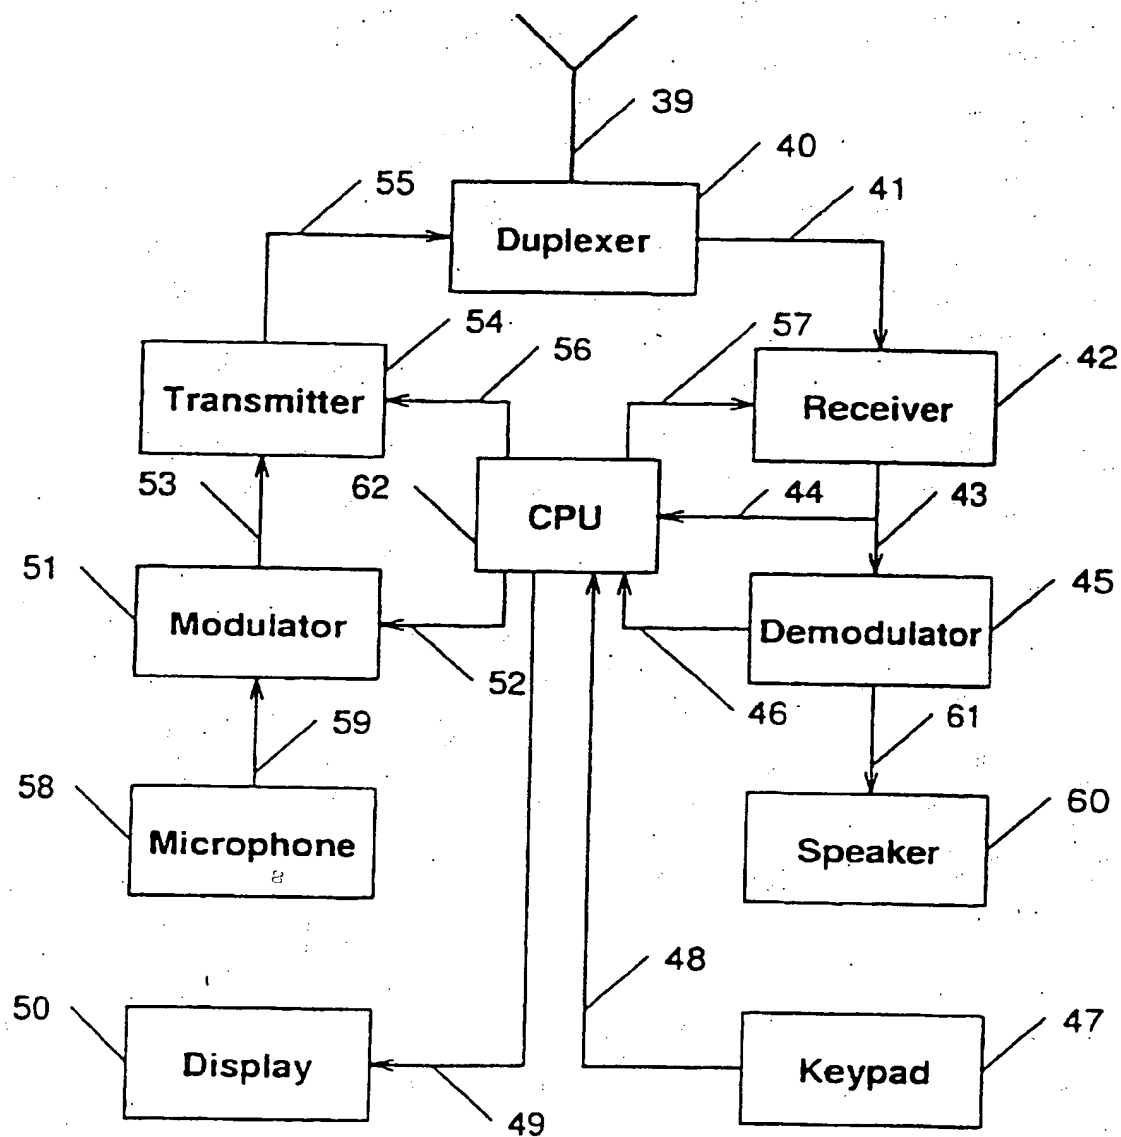


FIG. 8



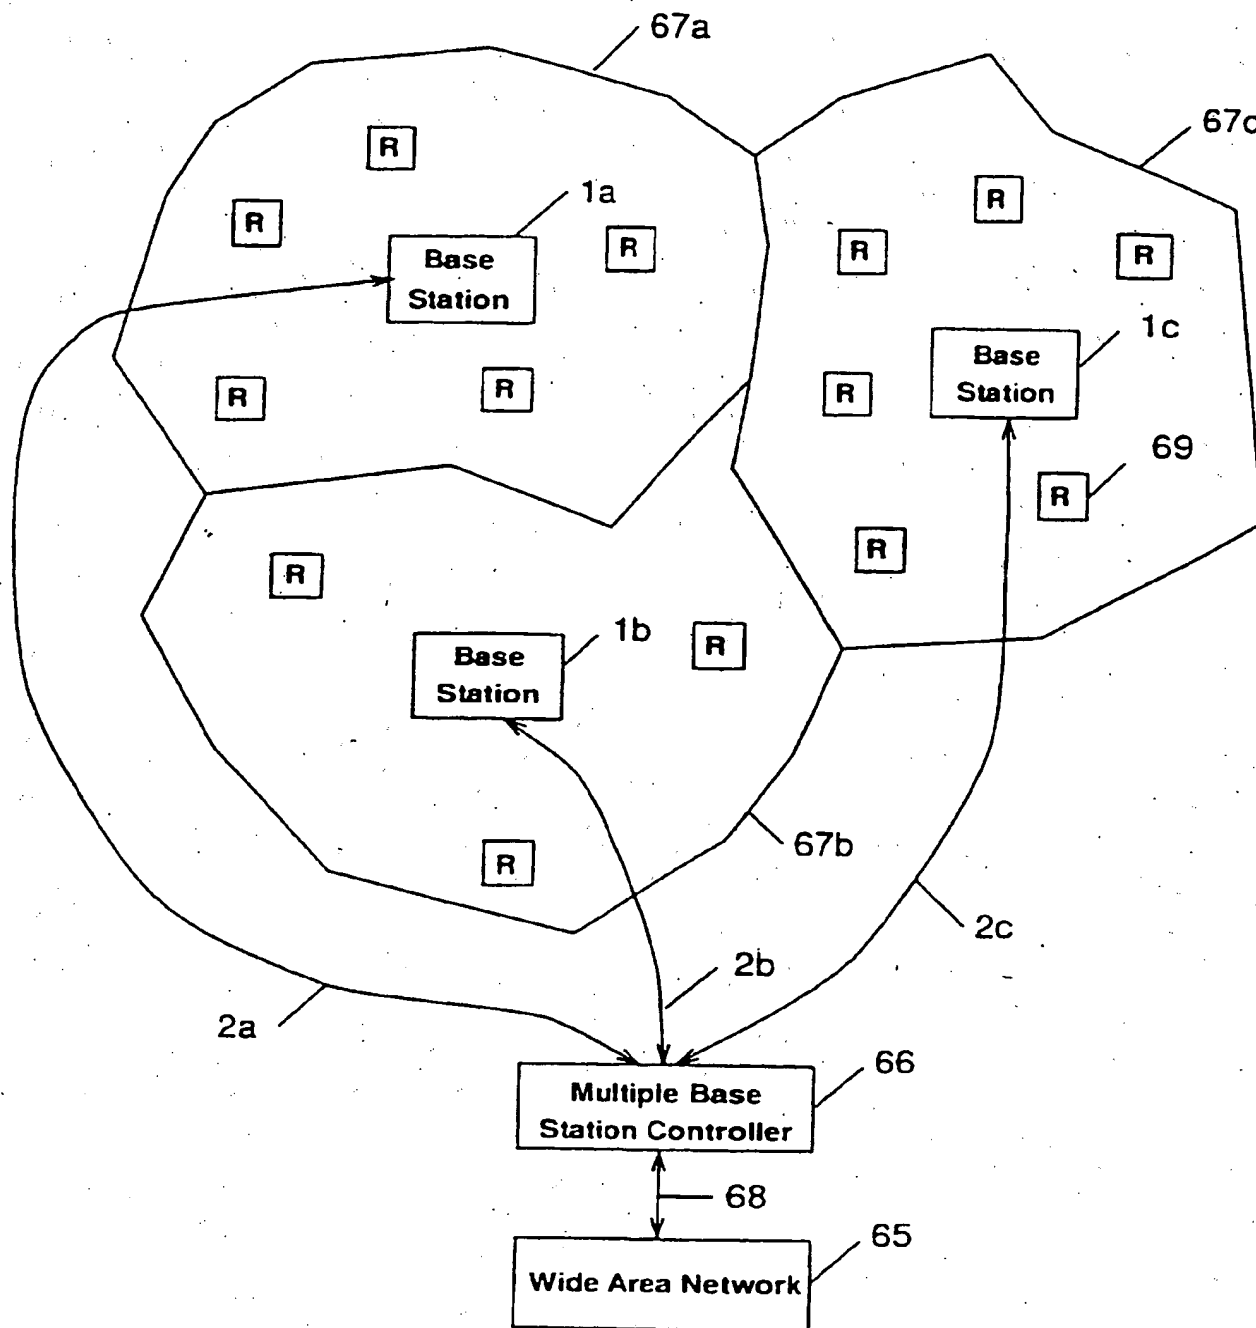


FIG. 9

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US95/15641

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04Q 7/20

US CL : 370/95.1, 95.3, 119; 342/368, 442, 378, 383, 384; 364/572, 574, 578, 581; 375/200, 205

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/95.1, 95.3, 119; 342/368, 442, 378, 383, 384; 364/572, 574, 578, 581; 375/200, 205

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 5,260,968 (GARDNER ET AL.) 09 November 1993, Fig. 7, 8, and col. 14, line 25, to col. 15, line 41.	1, 6, 9, 10-12, 14, 24, and 31
-----		-----
Y		13
Y	US, A, 5,103,459 (GILHOUSEN ET AL.) 07 April 1992, Fig. 9. and col. 9.	13

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

-	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be part of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E"	earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L"	document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

07 MARCH 1996

Date of mailing of the international search report

19 MAR 1996

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

CHAU T. NGUYEN

Telephone No. (703) 308-5340

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**